

# ILS Z or LOC Z RWY 19

JACKSON HOLE (JAC)

LOC/DME I-JAC <b>109.1</b> Chan 28	APP CRS <b>187°</b>	Rwy Idg <b>6300</b> TDZE <b>6451</b> Apt Elev <b>6451</b>
--	------------------------	---

DME required for LOC only. RNAV 1-GPS required. RADAR required for procedure entry at MOSSS.

**▼** Circling NA for Cats A, B, and C east of Rwy 1-19. Inop table does not apply to S-ILS 19\*. Circling NA for Cat D. For inop ALS increase S-LOC 19# Cats C and D visibility to RVR 4500.

**▲** -22°C


**MALS**

MISSED APPROACH: Climb to 6900 then climbing right turn to 14000 on JAC VOR/DME R-192 to KICNE INT/JAC 26.6 DME and hold, continue climb-in-hold to 14000.


\*Missed approach requires minimum climb of 225 feet per NM to 9400; if unable to meet gradient, see ILS Y or LOC Y RWY 19.

#Missed approach requires minimum climb of 234 feet per NM to 9600; if unable to meet gradient, see ILS Y or LOC Y RWY 19.


D-ATIS <b>120.625</b>	SALT LAKE CENTER <b>133.25 285.6</b>	<b>JACKSON TOWER*</b> <b>118.075 (CTAF)</b>	GND CON <b>124.55</b>	UNICOM <b>122.95</b>
--------------------------	---	--	--------------------------	-------------------------

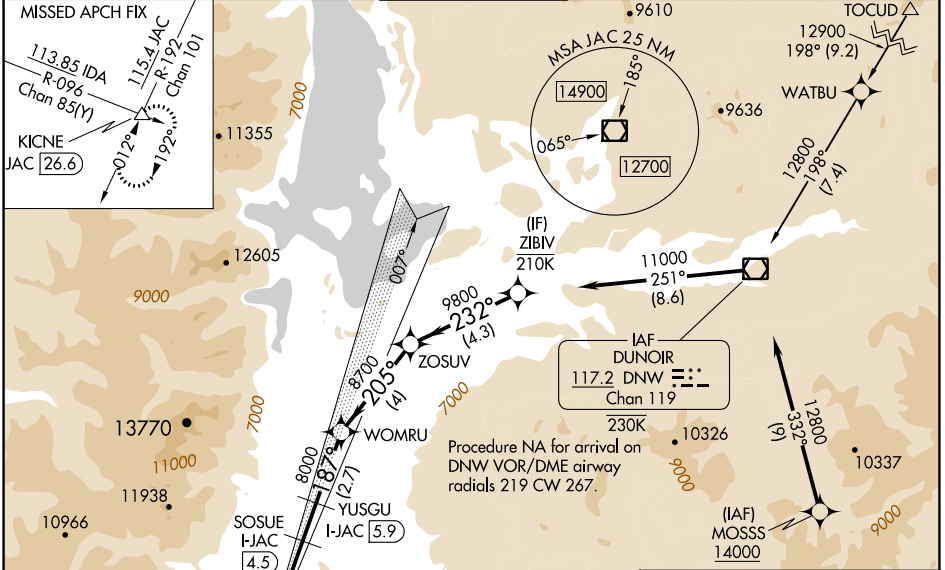

ELEV 6451	D	TDZE 6451
-----------	---	-----------

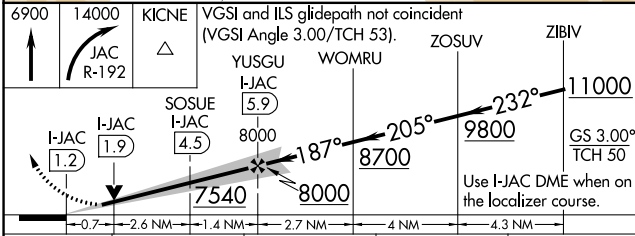

CATEGORY	A	B	C	D
S-ILS 19*		6651/40	200 (200-¾)	
S-LOC 19#		6720/40	269 (300-¾)	
<b>C</b> CIRCLING	6840-1 389 (400-1)	6960-1 509 (600-1)	7440-3 989 (1000-3)	NA

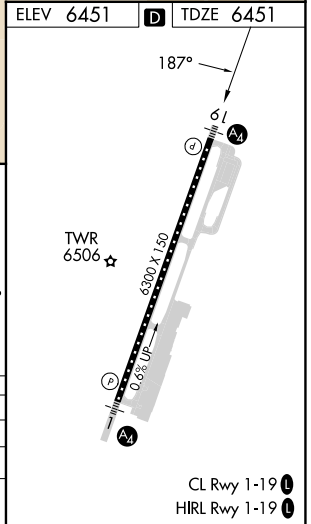

NW-1, 26 DEC 2024 to 23 JAN 2025

NW-1, 26 DEC 2024 to 23 JAN 2025