

DOVER, DELAWARE

ILS or LOC or RNAV (GPS) RWY 19

DOVER AFB (KDOV)

WAAAS CH 52208 W19A	APCH CRS 195°	Rwy ldg 9602 TDZE 23 Arpt Elev 29
---	-------------------------	--

[USAF]


RNP APCH. RNAV1 - GPS or RADAR required for ILS, LOC

- * When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile. RVR of 18 authorized with use of FD or AP or HUD to DA.
- ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to $1\frac{1}{2}$ miles.
- *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to $1\frac{1}{2}$ miles.





MISSED APPROACH: Climb to 2000 direct ANNUL and hold.
ALTERNATE MISSED APPROACH: Fly runway heading, climb and maintain 2000, expect radar vectors from ATC.

ATIS 127.825 273.5	APP CON 132.425 257.875	TOWER 126.35 279.625	GND CON 118.875 225.4	CLNC DEL 125.55 289.4
------------------------------	-----------------------------------	--------------------------------	---------------------------------	---------------------------------

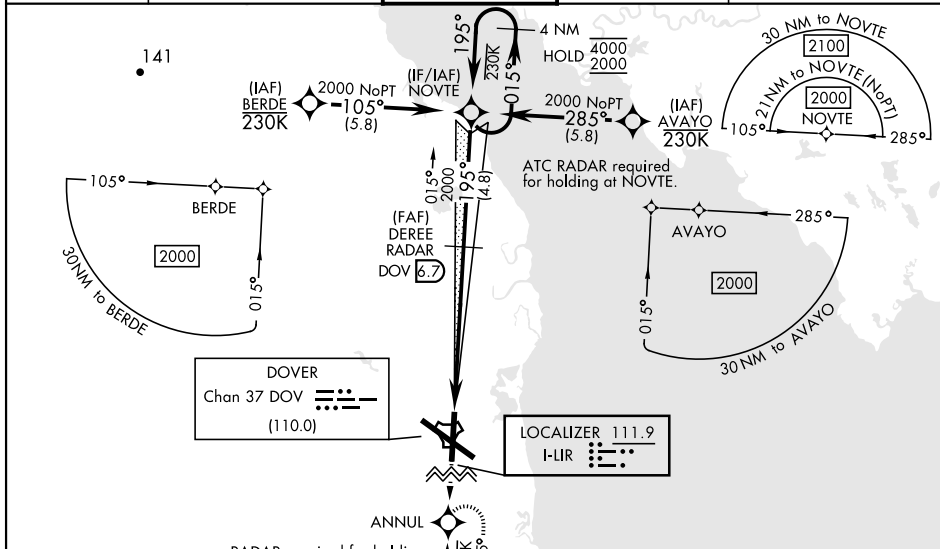

EMERG SAFE ALT 100 NM 4300

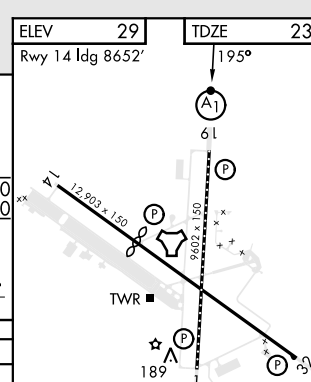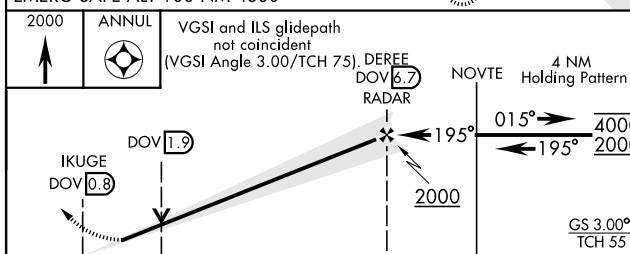

CATEGORY	A	B	C	D	E
S-ILS 19*	223/24		200	(200- $\frac{1}{2}$)	
LPV DA*	223/24		200	(200- $\frac{1}{2}$)	NA
S-LOC 19**	480/24	457 (500- $\frac{1}{2}$)	480/45	457	(500- $\frac{7}{8}$)
LNAV MDA***	480/24	457 (500- $\frac{1}{2}$)	480/45	457	(500- $\frac{7}{8}$)
CIRCLING	540-1	511 (600-1)	620-1 $\frac{1}{2}$	620-2	1080-3
			591 (600- $\frac{1}{2}$)	591 (600-2)	1051 (1100-3)

ELEV	29	TDZE	23
Rwy 14 ldg	8652'		
FAF to MAP 5.9 NM			
Knots	60	90	120 150 180
Min:Sec	5:54	3:56	2:57 2:22 1:58

DOVER, DELAWARE
Amdt 4 26DEC24

39°08'N-75°28'W

DOVER AFB (KDOV)

ILS or LOC or RNAV (GPS) RWY 19

NE-3, 26 DEC 2024 to 23 JAN 2025

NE-3, 26 DEC 2024 to 23 JAN 2025