

LOC I-PIA **109.9**
 APP CRS **309°**
 Rwy ldg **10104**
 TDZE **650**
 Apt Elev **661**

ILS or LOC RWY 31
 GENERAL DOWNING - PEORIA INTL (PIA)


DME required.

When local altimeter setting not received, use AAA altimeter setting: increase S-ILS 31 DA to 939 feet; increase all MDAs 100 feet and S-LOC 31 visibility CAT C/D/E to 1 1/4 SM and Circling visibility Cat C 1/4 SM and Cat D 1/2 SM. Circling Rwy 13, 31 NA at night. For inop ALS, when using AAA altimeter setting, increase S-ILS 31 all Cats visibility to RVR 4500, S-LOC 31 visibility Cats C/D/E to 1 3/8 SM. DME from PIA VORTAC. DME use requires simultaneous reception of I-PIA and PIA DME. For inop ALS, increase S-ILS 31 Cat E visibility to RVR 4000 and S-LOC 31 Cats C/D/E to 1 3/8 SM. *RVR 1800 authorized with the use of FD or AP or HUD to DA. (NA when using AAA altimeter setting).




MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct PIA VORTAC and hold, continue climb-in-hold to 2400.

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55
----------------------------	---	-------------------------------------	--------------------------------	-----------------------------------

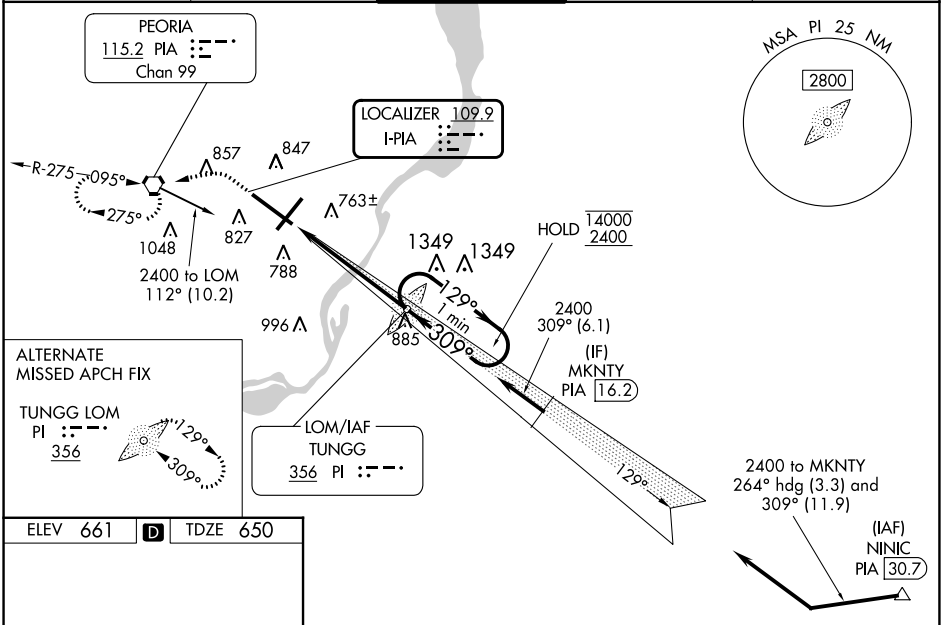

ALTERNATE MISSED APCH FIX
 TUNGG LOM
 PI 356
 LOM/IAF TUNGG
 356 PI

ELEV 661 TDZE 650
 HIRL Rws 4-22 and 13-31

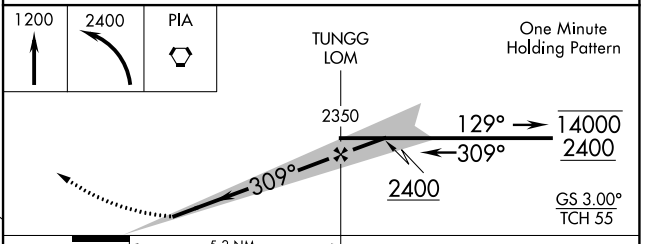

CATEGORY	A	B	C	D	E
S-ILS 31 *	850/24 200 (200-1/2)				
S-LOC 31	1120/24	470 (500-1/2)	1120/50	470 (500-1)	
C CIRCLING	1160-1	499 (500-1)	1180-1 1/2 519 (600-1 1/2)	1400-2 1/4 739 (800-2 1/4)	1680-3 1019 (1100-3)

EC-3, 26 DEC 2024 to 23 JAN 2025

EC-3, 26 DEC 2024 to 23 JAN 2025