LOC I-FNT	APP CRS	Rwy Idg	7201
109.9	094°	TDZE	771
		Apt Elev	782

ILS or LOC RWY 9

BISHOP INTL (FNT)

DME or RADAR required for procedure entry. DME or RADAR required.

DME from FNT VORTAC. Simultaneous reception of I-FNT and FNT DME required. For inop ALS, increase S-LOC 9 Cat C/D visibility to 1⅜ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 on FNT VORTAC R-093 to HARRO/FNT VORTAC 10 DME/RADAR and hold.

ATIS	GREAT LAKES APP CON ★	FLINT TOWER ★	GND CON	CLNC DEL	UNICOM
133.15	118.8 257.9	126.3 (CTAF) L 257.9	121.9	121.75	122.95

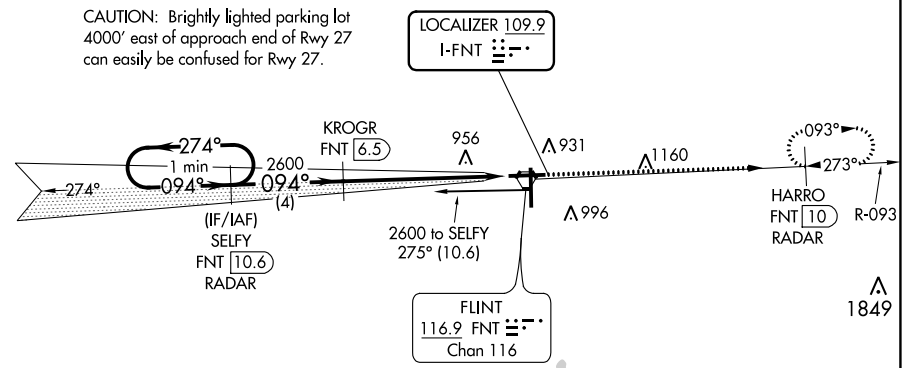



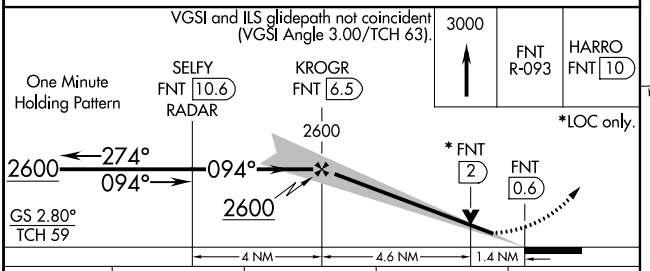

CATEGORY	A	B	C	D
S-ILS 9 **	971/24	200 (200-½)		
S-LOC 9	1280/24	509 (500-½)	1280/55	509 (500-1)
C CIRCLING	1280-1 498 (500-1)	1300-1 518 (600-1)	1300-1½ 518 (600-1½)	1520-2¼ 738 (800-2¼)

ELEV 782 D TDZE 771



HIRL Rwys 9-27 and 18-36 L
REIL Rwy 18 and 36 L

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

EC-1, 26 DEC 2024 to 23 JAN 2025
EC-1, 26 DEC 2024 to 23 JAN 2025