
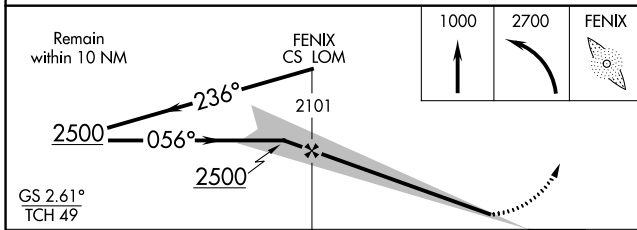


LOC I-CSG 110.3	APP CRS 056°	Rwy Idg TDZE 380 Apt Elev 398
---------------------------	------------------------	---

ILS or LOC RWY 6

COLUMBUS (CSG)

ADF or RADAR required.			MISSED APPROACH: Climb to 1000, then climbing left turn to 2700 direct FENIX LOM and hold, continue climb-in-hold to 2700.	
Circling to Rwy 13, 24 and 31 NA at night. Autopilot coupled approach NA below 900. Rwy 6 helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase S-ILS 06 all Cats visibility to RVR 4500. For inop ALS, increase S-LOC 06 Cats A and B visibility to RVR 5500 and Cats C and D visibility to 1 1/4 SM.				
ATIS 127.75	ATLANTA APP CON * 125.5 323.1	COLUMBUS TOWER * 120.1 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95

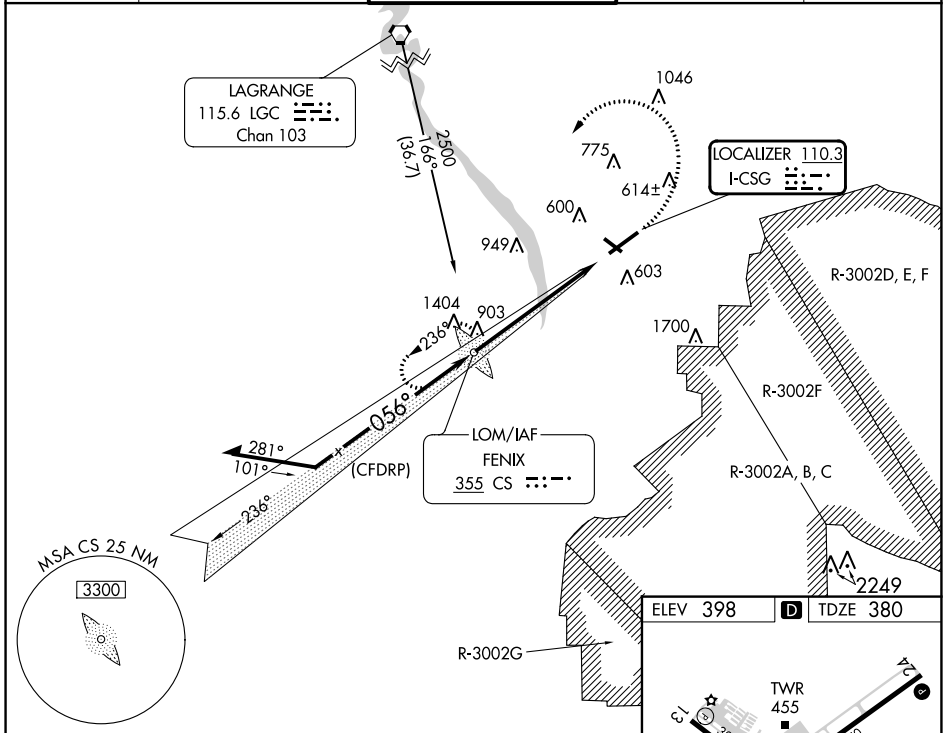

CATEGORY	A	B	C	D
S-ILS 6		664/40	284 (300-3/4)	
S-LOC 6	1020/40	640 (700-3/4)	1020-1 3/8 640 (700-1 3/8)	
CIRCLING	1020-1	622 (700-1)	1140-2 1/4 742 (800-2 1/4)	1300-3 902 (1000-3)

FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SE-4, 26 DEC 2024 to 23 JAN 2025

SE-4, 26 DEC 2024 to 23 JAN 2025