

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 77620 W05A | APP CRS 054° | Rwy Idg TDZE Apt Elev | 8204 1199 1226 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 5

AKRON-CANTON RGNL (CAK)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.
 ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR MISSED APPROACH: Climb to 3000 direct EGGII and on track 048° to ACO VOR/DME and hold.

| | | | | |
|-----------------------|--|---|-------------------------------|---------------------------|
| ATIS 121.05 | CLEVELAND APP CON * 125.5 269.25 | AKRON-CANTON TOWER 134.75 279.575 | GND CON 121.7 348.6 | CLNC DEL 132.05 |
|-----------------------|--|---|-------------------------------|---------------------------|

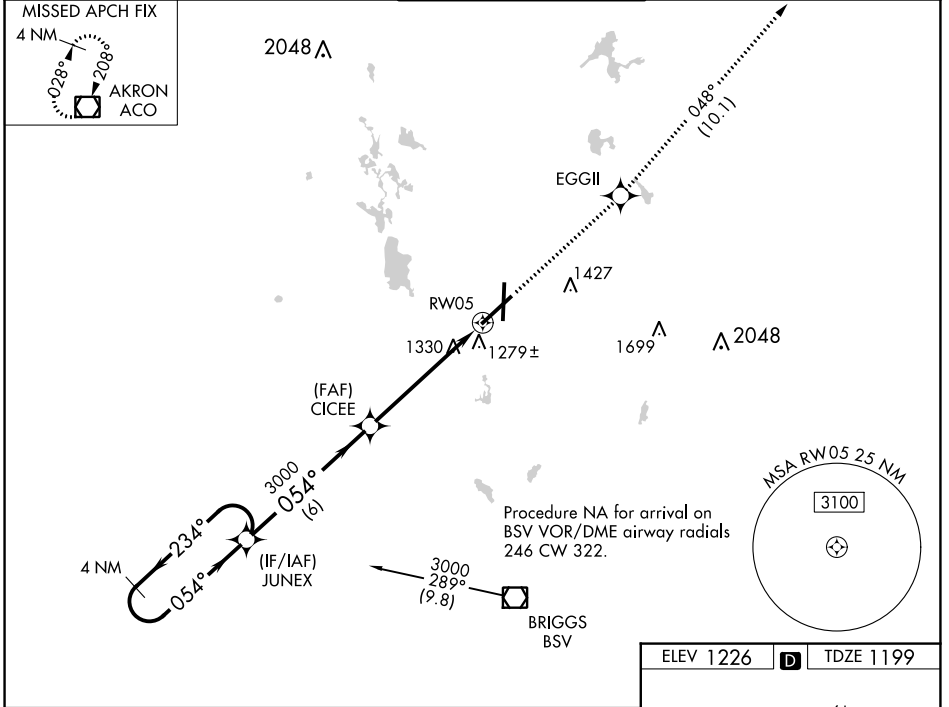

| | | | | | | | | |
|----------------------|---------|-------------|-------------------------|------------------------|--------|-------|-------------|-----|
| 4 NM Holding Pattern | JUNEX | | CICEE | | 3000 | EGGII | tr 048° | ACO |
| | ← 234° | → 054° | → 054° | → 054° | 3000 | | | |
| GP 3.00° TCH 50 | 6 NM | | 4.2 NM | | 1.3 NM | | * LNAV only | |
| CATEGORY | A | B | C | D | | | | |
| LPV DA** | 1399/24 | | 200 (200-½) | | | | | |
| LNAV/VNAV DA | 1577/50 | | 378 (400-1) | | | | | |
| LNAV MDA | 1640/24 | 441 (500-½) | 1640/40 441 (500-¾) | 1640/50 441 (500-1) | | | | |
| CIRCLING | 1760-1 | 534 (600-1) | 1780-1½ 554 (600-1½) | 1800-2 574 (600-2) | | | | |

