

WAAS CH <b>77813</b> <b>W32A</b>	APP CRS <b>321°</b>	Rwy Idg <b>6513</b> TDZE <b>712</b> Apt Elev <b>721</b>
--	------------------------	---

# RNAV (GPS) RWY 32

PELLSTON RGNL/EMMET COUNTY (PLN)

RNP APCH - GPS.


**⚠** Circling Rwy 5, 14 NA at night. Baro-VNAV and VDP NA when using MGN altimeter setting.  
**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.  
 For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 SM. For inop ALS when using MGN altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM and LNAV Cat C/D visibility to 1 1/8 SM. When local altimeter setting not received, use MGN altimeter setting and increase LPV DA to 942 feet; increase LNAV/VNAV DA to 1086 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D 1/8 SM.

MALSR



**MISSED APPROACH:**  
 Climb to 2600 direct VESUY and on track 051° to TOYUY and on track 135° to PLN  
 VORTAC and hold. (Do not exceed 200K until TOYUY).

ASOS <b>119.025</b>	MINNEAPOLIS CENTER <b>134.6 354.05</b>	UNICOM <b>123.0 (CTAF) 0</b>
------------------------	---	---------------------------------

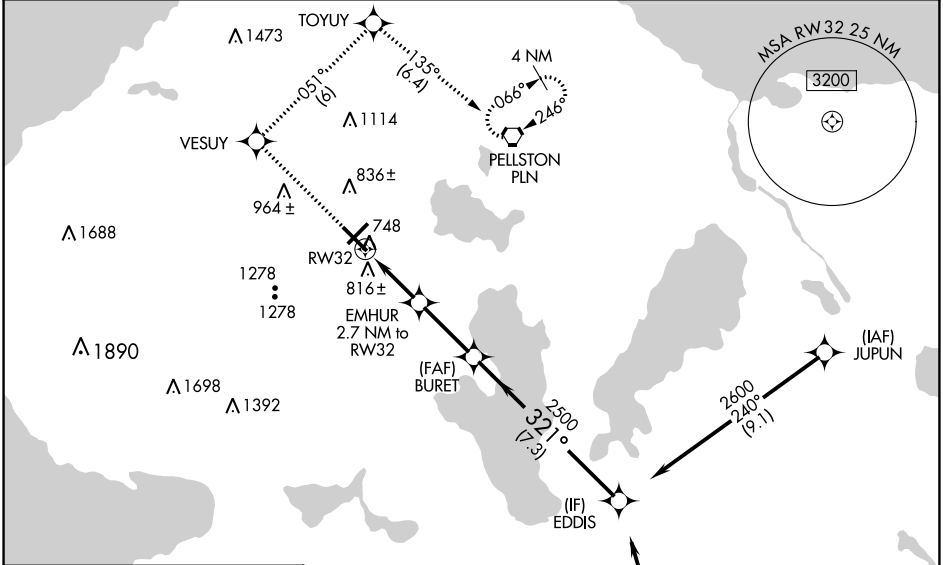


EC-1, 26 DEC 2024 to 23 JAN 2025

EC-1, 26 DEC 2024 to 23 JAN 2025

ELEV 721	<b>D</b>	TDZE 712
----------	----------	----------

Procedure NA for arrivals at RONDO on V609 southbound.

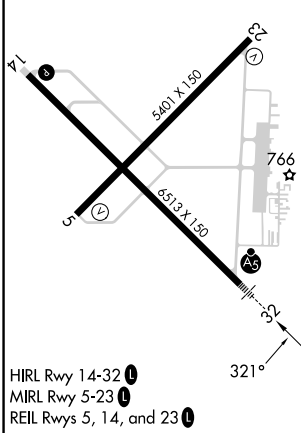

2600	VESUY	tr 051°	TOYUY	tr 135°	PLN	BURET	EDDIS
						2500	2600
			1 NM to RW32	2.7 NM to RW32			GP 3.00° TCH 54
			1 NM	1.7 NM	2.8 NM	7.3 NM	
CATEGORY	A		B		C	D	
LPV DA			912-1/2		200 (200-1/2)		
LNAV/VNAV DA			1056-5/8		344 (400-5/8)		
LNAV MDA	1080-1/2		368 (400-1/2)		1080-5/8		368 (400-5/8)
CIRCLING	1280-1 559 (600-1)		1320-1 599 (600-1)		1560-2 1/2 839 (900-2 1/2)		1660-3 939 (1000-3)