

LOC/DME I-JHW 109.7 Chan 34	APP CRS 249°	Rwy Idg TDZE 1721 Apt Elev 1723
---	------------------------	---

ILS or LOC RWY 25
CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

⚠ Circling to Rwy 13/31 NA at night. Autopilot coupled approach NA below 2420. VDP NA with Dunkirk altimeter setting. Cat D SI NA when using Dunkirk altimeter. When local altimeter setting not received, use Dunkirk altimeter setting and increase S-ILS 25 DA to 2161 and all MDA 200 feet; increase S-ILS 25 all Cats visibility 3/4 mile; increase S-LOC 25 Cats A and B visibility to 3/4, Circling Cats A and B 1 1/4, increase S-LOC 25 Cats C and D visibility to 2, Circling Cats C visibility 2 3/4 and D visibility 3, DIPRE fix minimums increase S-LOC 25 Cats C and D visibility 1 1/8, and Circling Cats C visibility 2 and Cat D visibility 2 3/4 mile. For inoperative MALSR when using Dunkirk altimeter setting, increase S-ILS 25 all Cats visibility 1 3/8 mile. VDP NA when using Dunkirk altimeter setting.

MALSR




MISSED APPROACH: Climb to 2420 then climbing right turn to 3800 on heading 125° and I-JHW LOC course NE to KRAUS INT/ I-JHW 6.6 DME and hold.

AWOS-3PT
118.425

BUFFALO APP CON *
126.05


UNICOM
122.975 (CTAF) 0

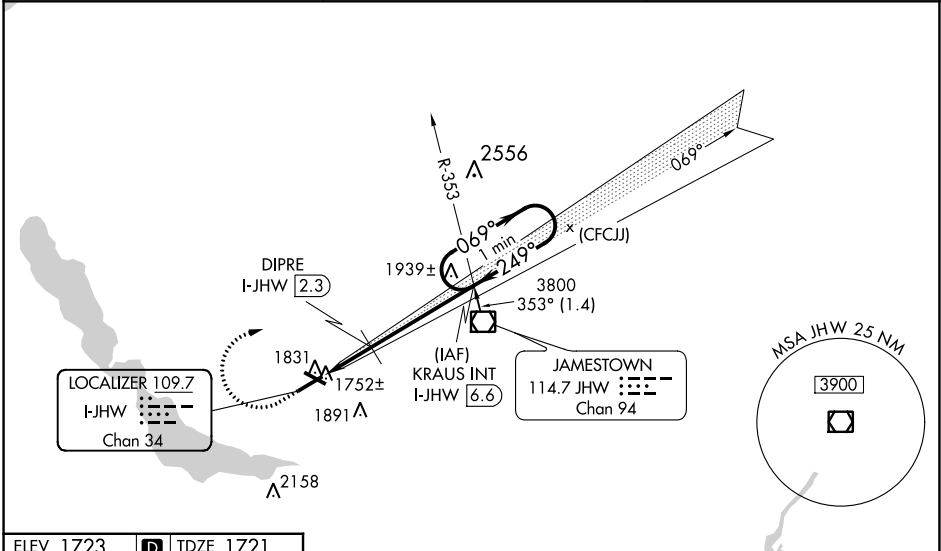

NE-2, 26 DEC 2024 to 23 JAN 2025

NE-2, 26 DEC 2024 to 23 JAN 2025

ELEV 1723	D	TDZE 1721
-----------	----------	-----------

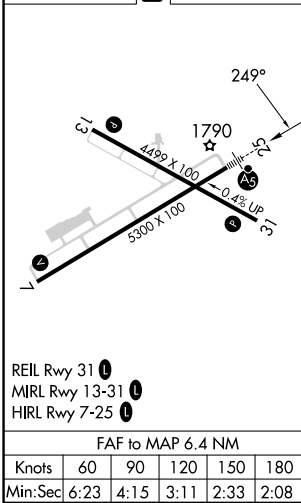

2420	3800	LOC crs NE	KRAUS INT	KRAUS INT I-JHW 6.6	One Minute Holding Pattern
↑	hdg 125°				
I-JHW 0.2	*I-JHW 1.1	DIPRE I-JHW 2.3		3800	069° → 3800
*LOC only.					← 249°
					GS 3.00° TCH 48
					* 2620 when using Dunkirk altimeter setting.
	1 NM	1.1 NM	4.3 NM		
CATEGORY	A	B	C	D	
S-ILS 25		1971-1/2	250 (300-1/2)		
S-LOC 25	2420-1/2	699 (700-1/2)	2420-1 1/2	699 (700-1/2)	
C CIRCLING	2420-1	697 (700-1)	2420-2	2420-2 1/4	697 (700-2 1/4)
DIPRE FIX MINIMUMS (DME REQUIRED)					
S-LOC 25	2080-1/2	359 (400-1/2)	2080-5/8	359 (400-5/8)	
C CIRCLING	2200-1	477 (500-1)	2260-1 1/2	2340-2	537 (600-1 1/2)
					617 (700-2)