

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>72830</b><br><b>W36A</b> | APP CRS<br><b>358°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5759</b><br><b>36</b><br><b>36</b> |
|--|------------------------|-----------------------------|---------------------------------------|

# RNAV (GPS) RWY 36R


VALLEY INTL (HRL)

RNP APCH - GPS.



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Baro-VNAV and VDP NA when using Port Isabel altimeter setting. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 278 feet; increase LNAV/VNAV DA to 328 feet and all visibilities ½ SM, increase all MDAs 60 feet and LNAV visibility Cat C and D ½ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2000 direct BETVE and hold.

|                       |                                      |  |                         |                         |
|-----------------------|--------------------------------------|--|-------------------------|-------------------------|
| ATIS<br><b>124.85</b> | VALLEY APP CON<br><b>120.7 279.5</b> | HARLINGEN TOWER ★<br><b>119.3 (CTAF) 317.6</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--------------------------------------|--|-------------------------|-------------------------|

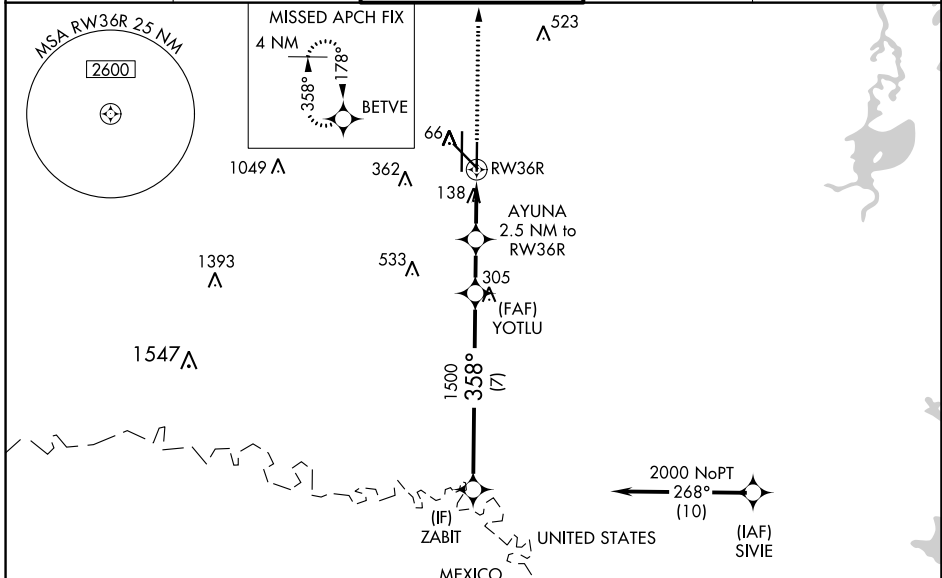

|         |          |         |
|---------|----------|---------|
| ELEV 36 | <b>D</b> | TDZE 36 |
|---------|----------|---------|

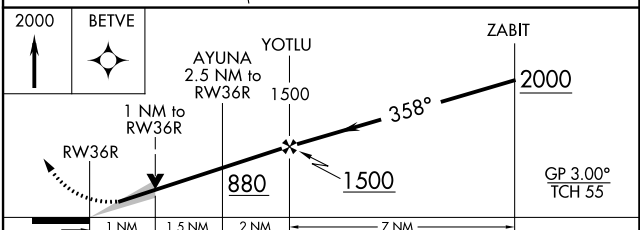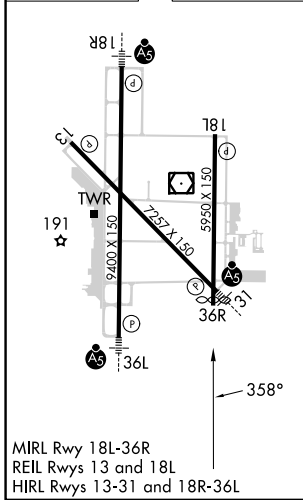

| CATEGORY          | A                    | B                    | C                      | D                    |
|-------------------|----------------------|----------------------|------------------------|----------------------|
| LPV DA            |                      | 236-¾                | 200 (200-¾)            |                      |
| LNAV/VNAV DA      |                      | 286-¾                | 250 (300-¾)            |                      |
| LNAV MDA          |                      | 400-1                | 364 (400-1)            |                      |
| <b>C</b> CIRCLING | 460-1<br>424 (500-1) | 560-1<br>524 (600-1) | 600-1½<br>564 (600-1½) | 680-2<br>644 (700-2) |

SC-3, 26 DEC 2024 to 23 JAN 2025

SC-3, 26 DEC 2024 to 23 JAN 2025