VOR Z RWY 31

VALLEY INTL (HRL)

VOR/DME HRL	APP CRS	Rwy Idg	7257
113.65	325°	TDZE	36
Chan 83 (Y)		Apt Elev	36

DME required.

VDP NA when using Port Isabel altimeter setting. When local altimeter setting not received, use Port Isabel altimeter setting and increase all MDAs 60 feet and S-31 visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS, increase S-31 Cats C/D visibilities to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2100 direct HRL VOR/DME and hold, continue climb and hold to 2100.

ATIS	VALLEY APP CON	HARLINGEN TOWER ★	GND CON	UNICOM
124.85	120.7 279.5	119.3 (CTAF) L 317.6	121.7	122.95

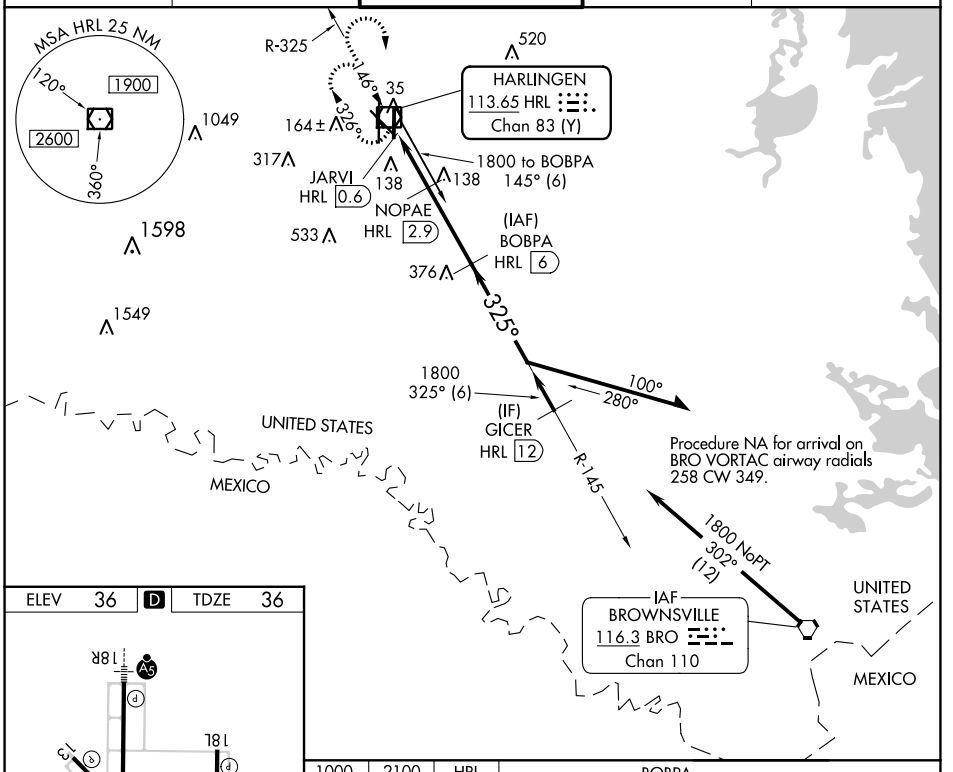

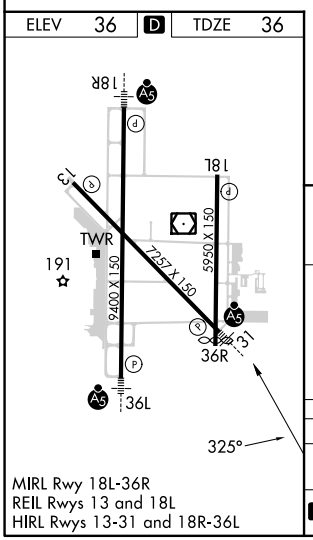

MIRL Rwy 18L-36R
REIL Rwys 13 and 18L
HIRL Rwys 13-31 and 18R-36L

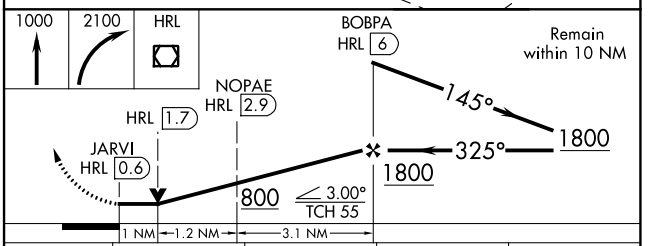

CATEGORY	A	B	C	D
S-31	420-½ 384 (400-½)		420-¾ 384 (400-¾)	
C CIRCLING	460-1 424 (500-1)	560-1 524 (600-1)	600-1½ 564 (600-1½)	680-2 644 (700-2)

SC-3, 26 DEC 2024 to 23 JAN 2025
SC-3, 26 DEC 2024 to 23 JAN 2025