

LOC I-JVL	APP CRS	Rwy ldg	<b>6701</b>
<b>109.1</b>	<b>044°</b>	TDZE	<b>806</b>
		Apt Elev	<b>808</b>

# ILS or LOC RWY 4

SOUTHERN WISCONSIN RGNL (JVL)



DME required. RNP APCH - GPS.

▼ When local altimeter setting not received, use Rockford altimeter setting and increase DA 69 feet and all MDAs 80 feet; increase S-LOC 4 Cats C/D and Circling Cats C/D ¼ SM. For inop ALS when using Rockford altimeter setting; increase S-ILS 4 all Cats visibility to ¾ SM and S-LOC 4 Cats C/D visibility to 1½ SM. Circling Rwy 18 NA at night. DME from JVL VOR/DME. DME use requires simultaneous reception of I-JVL and JVL VOR/DME.

MALSRL

MISSED APPROACH:  
Climb to 3100 direct  
OTLEE and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
<b>128.25</b>	<b>121.0 327.0</b>	<b>118.8(CTAF) 0 225.4</b>	<b>121.65</b>	<b>121.65</b>	<b>122.95</b>

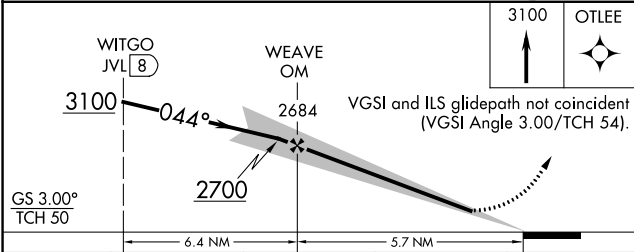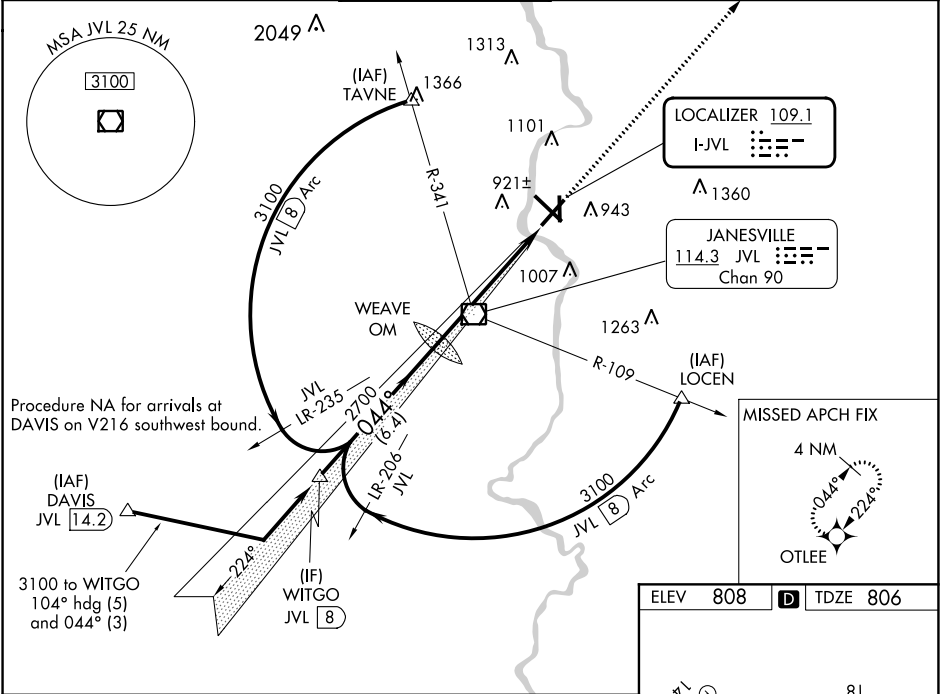

ELEV	808	TDZE	806
------	-----	------	-----

TWR 892

REIL Rws 14 and 22

MIRL Rwy 18-36

HIRL Rws 4-22 and 14-32

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

CATEGORY	A	B	C	D
S-ILS 4	1006-½		200 (200-½)	
S-LOC 4	1400-½	594 (600-½)	1400-1 594 (600-1)	1400-1¼ 594 (600-1¼)
CIRCLING	1400-1	592 (600-1)	1420-1¾ 612 (700-1¾)	1460-2 652 (700-2)

EC-3, 26 DEC 2024 to 23 JAN 2025

EC-3, 26 DEC 2024 to 23 JAN 2025