

WAAS CH 49119 W19B	APP CRS 196°	Rwy Idg TDZE Apt Elev	7302 1320 1333
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19L

WICHITA DWIGHT D EISENHOWER NTL (ICT)




RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.



MISSED APPROACH:
Climb to 3600 direct
YELOO and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6	CLNC DEL 125.7
-----------------------	---------------------------------------	-------------------------------------	-------------------------------	--------------------------

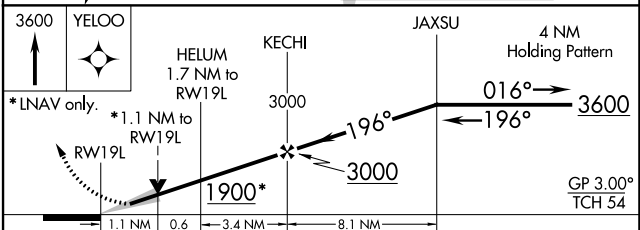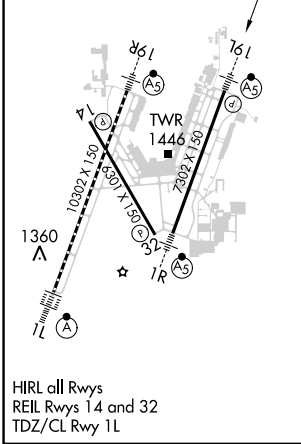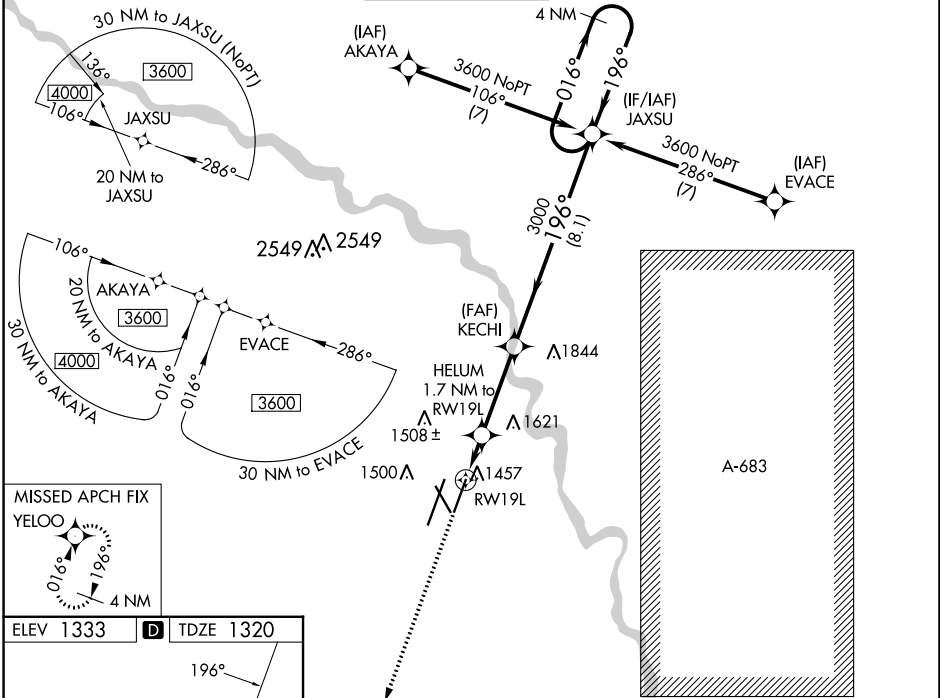

CATEGORY	A	B	C	D
LPV DA	1520-½		200 (200-½)	
LNAV/VNAV DA	1747-¾		427 (500-¾)	
LNAV MDA	1780-½ 460 (500-½)		1780-⅞ 460 (500-⅞)	
C CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾) 1980-2 647 (700-2)	

NC-2, 26 DEC 2024 to 23 JAN 2025

NC-2, 26 DEC 2024 to 23 JAN 2025