POTTR TWO DEPARTURE

ANCHORAGE DEP CON
126.4 270.25
D-ATIS
135.5
CLNC DEL
119.4 323.1
GND CON
121.9 338.25
ANCHORAGE TOWER
118.3 257.8

RADAR required.

TOP ALTITUDE: 4000

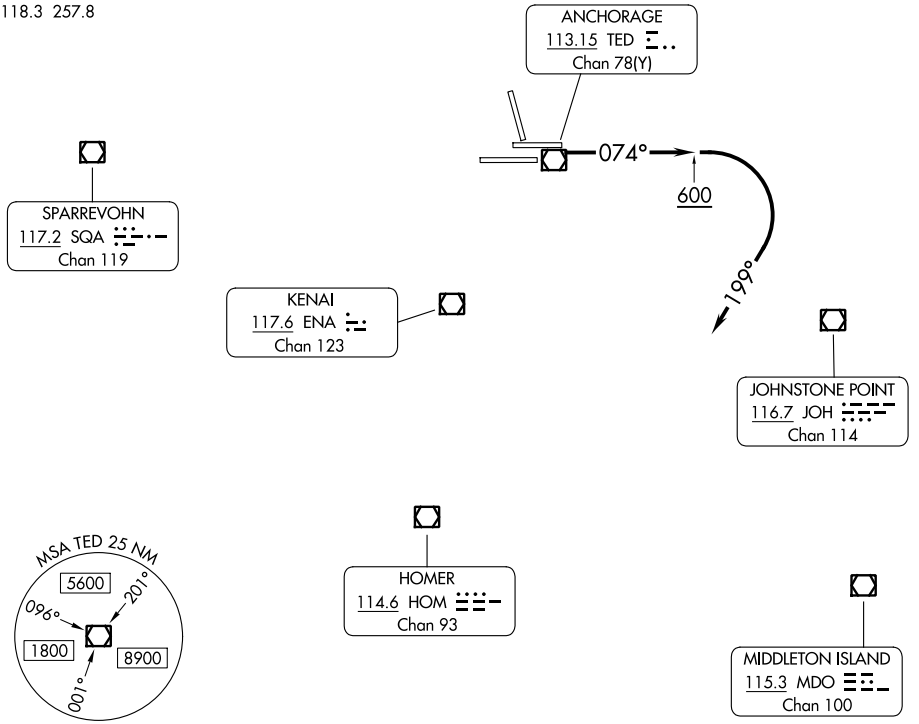

TAKEOFF MINIMUMS
Rwys 15, 25L/R, 33: NA - ATC.
Rwy 7L: 300-1⅛ or standard with minimum climb of 255 feet per NM to 400.
Rwy 7R: 300-1 or standard with minimum climb of 285 feet per NM to 400.

NOTE: Do not exceed 200K.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb on heading 074° to 600, then climbing right turn on heading 199°. Thence. . . .

. . . .expect RADAR vectors to assigned route or depicted fix. Maintain 4000. Expect further clearance to filed altitude within 10 minutes after departure.

AK, 26 DEC 2024 to 20 FEB 2025
AK, 26 DEC 2024 to 20 FEB 2025