

| | | | |
|---------------------------------|------------------------|-----------------------------|-------------------------------------|
| WAAS CH 86738 W07A | APP CRS 075° | Rwy Idg TDZE Apt Elev | 3502 8 8 |
|---------------------------------|------------------------|-----------------------------|-------------------------------------|


RNAV (GPS) RWY 7

PROVINCETOWN MUNI (PVC)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Inop table does not apply to LPV Cats A and B. When local altimeter setting not received, use Hyannis altimeter setting: increase LPV DA to 271, increase LNAV/VNAV DA to 331, and Cat A/B visibility 1/8 mile and all MDA 80 feet. For inop MALSF when using Hyannis altimeter setting, increase LPV Cat A/B visibility to 7/8 mile. Baro-VNAV and VDP NA when using Hyannis altimeter setting.

MALSF
MISSED APPROACH:
Climb to 3000 direct WULGA and hold.

| | | | | |
|----------------------------|--------------------------------|---------------------------|-------------------------------|------------------------|
| AWOS-3PT 119.275 | BOSTON APP CON 118.2 | CLNC DEL 120.65 | UNICOM 122.8 (CTAF) | 122.85 0 |
|----------------------------|--------------------------------|---------------------------|-------------------------------|------------------------|

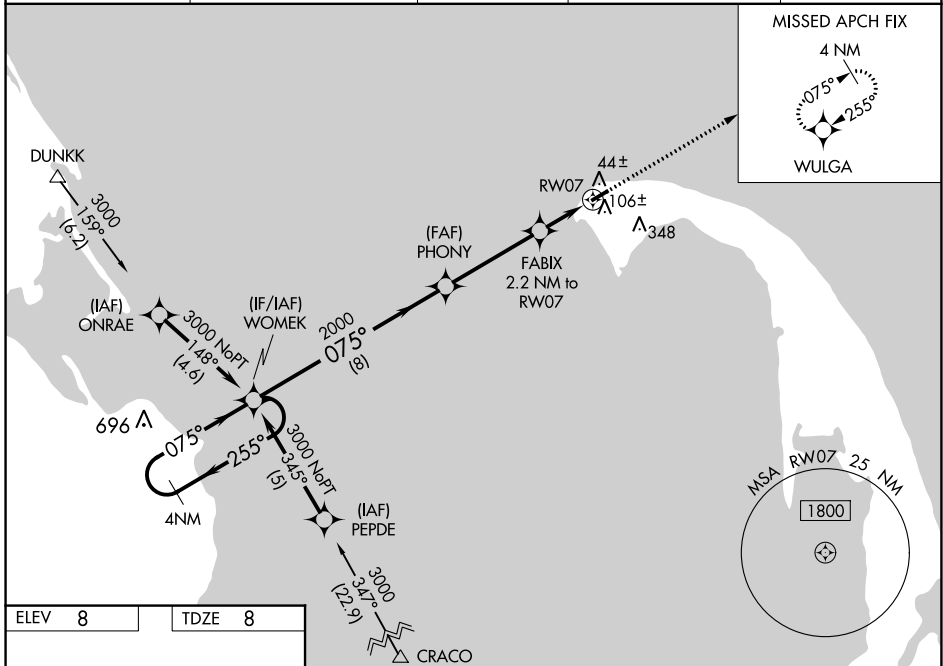

| | |
|---------------|---------------|
| ELEV 8 | TDZE 8 |
|---------------|---------------|

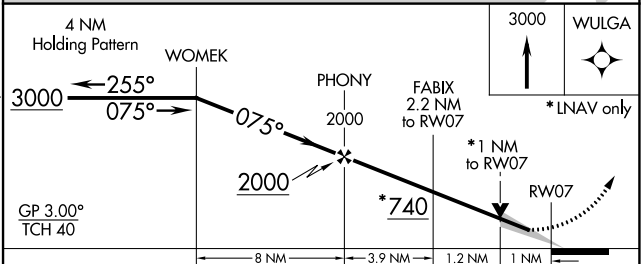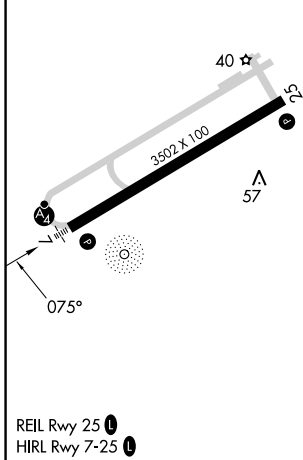

| CATEGORY | A | B | C | D |
|-------------------|----------------------|----------------------|---|----|
| LPV DA | 208-3/4 | 200 (200-3/4) | | NA |
| LNAV/VNAV DA | 268-3/4 | 260 (300-3/4) | | NA |
| LNAV MDA | 360-3/4 | 352 (400-3/4) | | NA |
| C CIRCLING | 460-1 452 (500-1) | 660-1 652 (700-1) | | NA |

NE-1, 26 DEC 2024 to 23 JAN 2025

NE-1, 26 DEC 2024 to 23 JAN 2025