


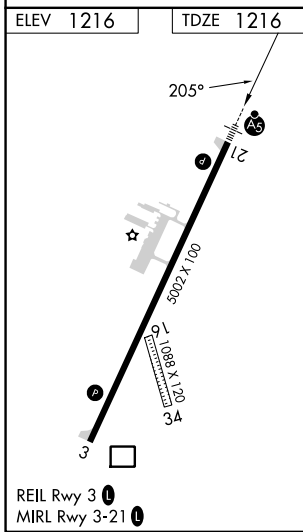
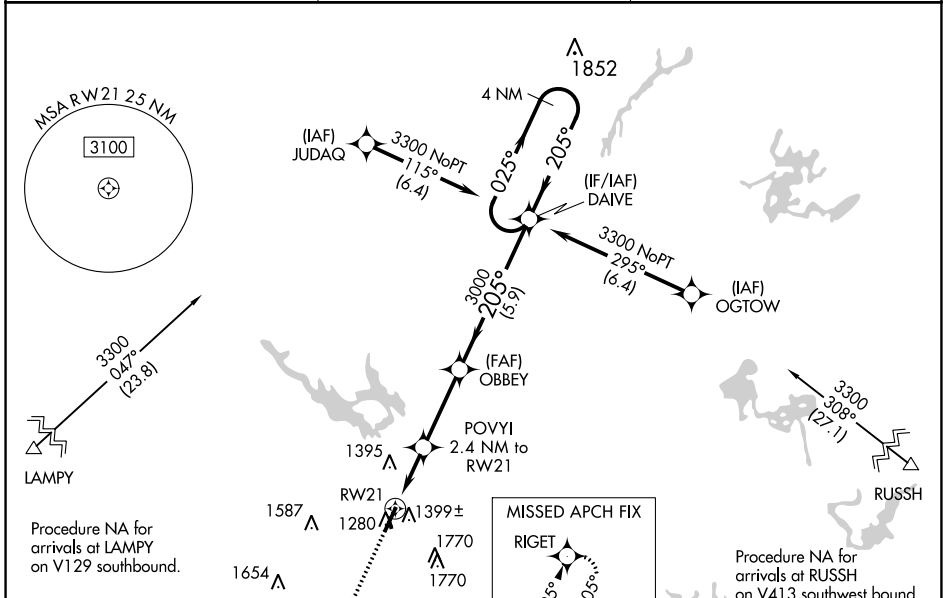
| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 49000 W21A | APP CRS 205° | Rwy Idg TDZE Apt Elev | 5002 1216 1216 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 21

SAWYER COUNTY (HYR)

| | | | |
|-----------|---|--|--|
| RNP APCH. | <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cat A and B visibility to 1 mile. Rwy 21 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy 16 and 34.</p> | <p>MALSR</p>  | <p>MISSED APPROACH: Climb to 3100 direct RIGET and hold.</p> |
|-----------|---|--|--|

| | | |
|----------------------|---|---------------------------------|
| ASOS 118.4 | MINNEAPOLIS CENTER 126.45 276.4 | UNICOM 122.8 (CTAF) 0 |
|----------------------|---|---------------------------------|



| CATEGORY | A | B | C | D |
|--|-----------------------|-------------------------|--------------------------|------------------------|
| LPV DA | | 1518-¾ | 302 (400-¾) | |
| LNAV/VNAV DA | | 1560-¾ | 344 (400-¾) | |
| LNAV MDA | | 1640-¾ | 424 (500-¾) | |
| <input checked="" type="checkbox"/> CIRCLING | 1860-1 644 (700-1) | 2060-1¼ 844 (900-1¼) | 2120-2¾ 904 (1000-2¾) | 2120-3 904 (1000-3) |