

|                           |                        |                 |
|---------------------------|------------------------|-----------------|
| LOC I-VPZ<br><b>109.7</b> | APP CRS<br><b>272°</b> | Rwy Idg<br>6500 |
|                           |                        | TDZE<br>770     |
|                           |                        | Apt Elev<br>770 |


# ILS or LOC RWY 27

PORTER COUNTY RGNL (VPZ)

|  |            |   |
|--|------------|---|
| ADF required.<br>▼<br>▲ For inop ALS, increase S-LOC 27 Cats C and D visibility to 1 SM. | MALSR<br>▲ | MISSED APPROACH: Climb to 1400, then climbing right turn to 2600 direct SEDLY LOM and hold, continue climb-in-hold to 2600. |
|--|------------|---|

|                        |   |                            |  |
|------------------------|---|----------------------------|--|
| ASOS<br><b>125.875</b> | SOUTH BEND APP CON *<br><b>132.05 257.8</b> | CLNC DEL<br><b>120.525</b> | UNICOM<br><b>122.725</b> (CTAF) <b>0</b> |
|------------------------|---|----------------------------|--|



Procedure NA for arrivals at CGT VORTAC on V8-92 westbound.

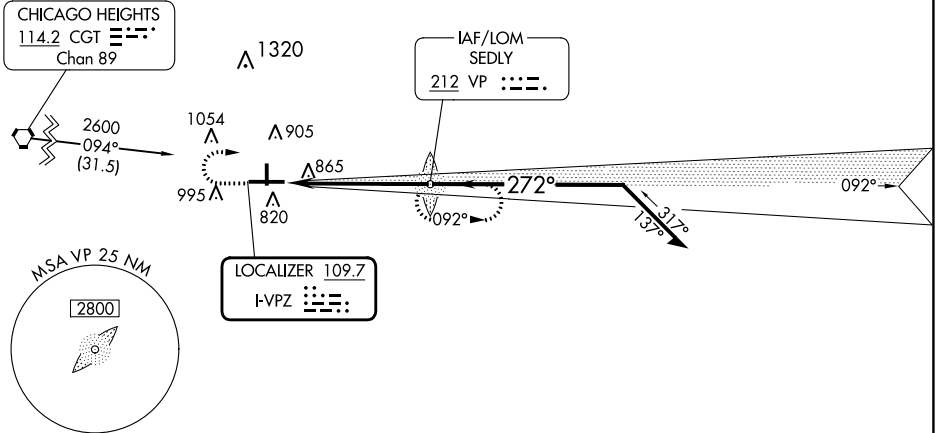

EC-2, 26 DEC 2024 to 23 JAN 2025

EC-2, 26 DEC 2024 to 23 JAN 2025

|          |   |          |
|----------|---|----------|
| ELEV 770 | D | TDZE 770 |
|----------|---|----------|

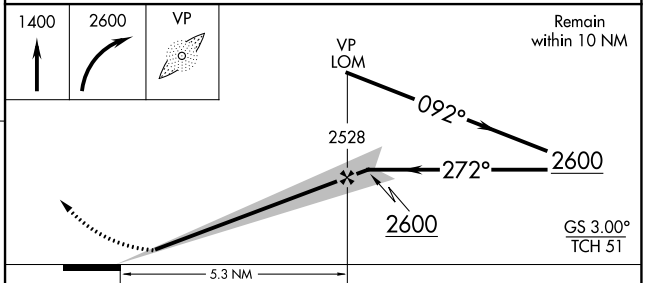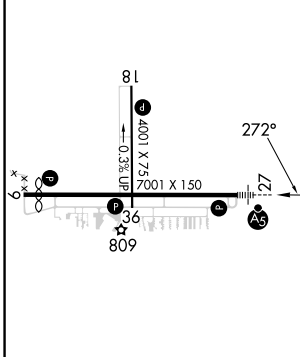

HIRL Rwy 9-27

MIRL Rwy 18-36

REIL Rwys 9, 18 and 36

FAF to MAP 5.3 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:18 | 3:32 | 2:39 | 2:07 | 1:46 |

| CATEGORY | A                      | B                     | C                             | D                             |
|----------|------------------------|-----------------------|-------------------------------|-------------------------------|
| S-ILS 27 | 970-1/2 200 (200-1/2)  |                       |                               |                               |
| S-LOC 27 | 1120-1/2 350 (400-1/2) |                       | 1120-5/8 350 (400-5/8)        |                               |
| CIRCLING | 1260-1<br>490 (500-1)  | 1300-1<br>530 (600-1) | 1360-1 1/2<br>590 (600-1 1/2) | 1620-2 3/4<br>850 (900-2 3/4) |