



APP CRS	Rwy Idg	<b>4300</b>
<b>281°</b>	TDZE	<b>1934</b>
	Apt Elev	<b>1934</b>

# RNAV (GPS) RWY 28

ST MARYS MUNI (OYM)

RNP APCH - GPS.		MALS 	MISSED APPROACH: Climb to 4000 direct PUNKS and hold.
	Rwy 28 helicopter visibility reduction below 3/4 SM NA. Inop table does not apply to LNAV Cat A. VDP NA when using Bradford altimeter setting. When local altimeter setting not received, use Bradford altimeter setting and increase all MDA 240 feet, LNAV visibility Cats B/C/D 1/2 SM, and Circling visibility Cats B/C 1/2 SM. For inop ALS increase LNAV visibility Cat C/D to 2 1/2 SM. For inop ALS when using Bradford altimeter setting, increase LNAV visibility Cat C/D to 3 SM.		

AWOS-3P <b>118.05</b>	CLEVELAND CENTER <b>126.725 291.65</b>	ALTOONA CLNC DEL <b>122.4</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------	---	----------------------------------	---------------------------------

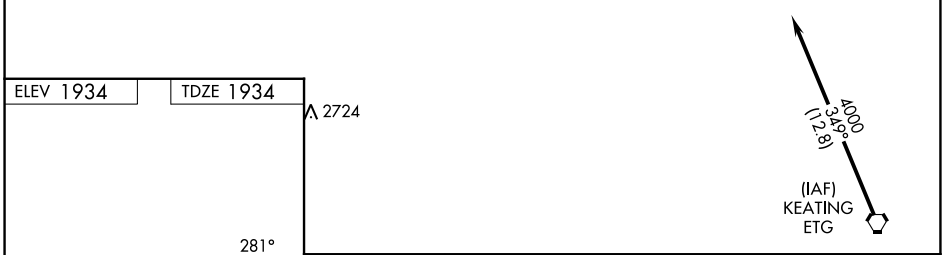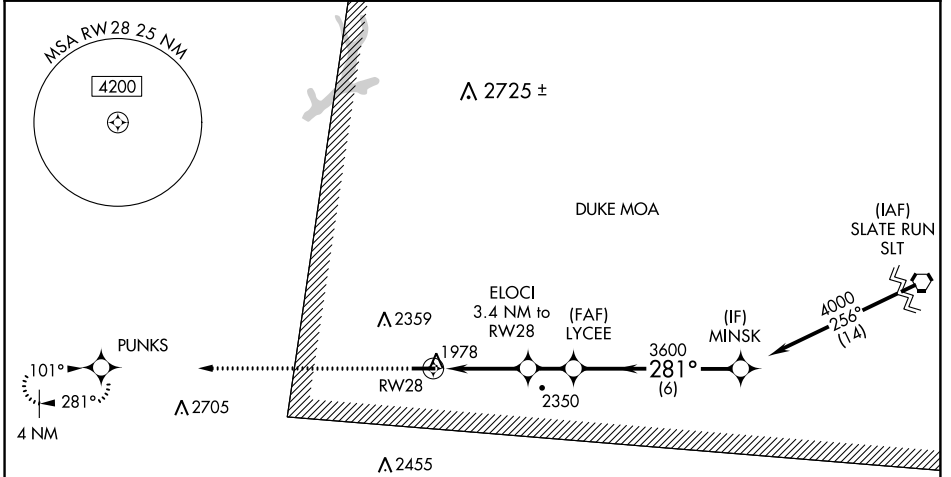

ELEV 1934	TDZE 1934		
MIRS Rwy 10-28 0			
CATEGORY	A	B	C
LNAV MDA	2760-1	826 (900-1)	2760-2
CIRCLING	2760-1 1/4	826 (900-1 1/4)	2840-3
			906 (1000-3)

NE-4, 26 DEC 2024 to 23 JAN 2025

NE-4, 26 DEC 2024 to 23 JAN 2025