WAAS CH 82106 W12A	APP CRS 125°	Rwy Idg 7221 TDZE 1183 Apt Elev 1183

RNAV (GPS) RWY 12

SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD (MML)

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Tracy Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. When local altimeter setting not received, use Tracy Muni altimeter setting and increase LPV DA to 1441 feet; LNAV/VNAV DA to 1548 and all Cats visibilities ⅛ SM; increase all MDA 60 feet, LNAV visibility Cat C/D ⅛ SM and Circling visibility Cat C/D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM, and LNAV Cat C/D visibility to 1 SM. For inop ALS when using Tracy Muni altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct BOPMY and hold.

AWOS-3PT	MINNEAPOLIS CENTER	GCO	UNICOM
120.150	127.1 290.2	121.725	122.8 (CTAF) L

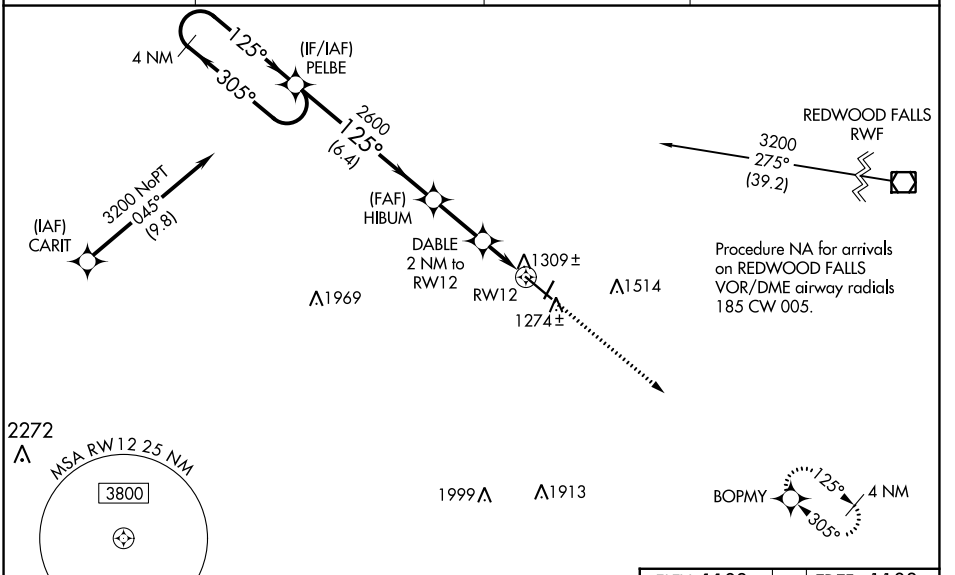

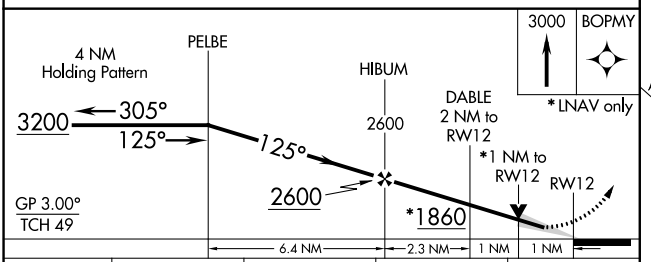

CATEGORY	A	B	C	D
LPV DA	1383-½ 200 (200-½)			
LNAV/VNAV DA	1490-½ 307 (400-½)			
LNAV MDA	1560-½ 377 (400-½)		1560-⅝ 377 (400-⅝)	
CIRCLING	1640-1 457 (500-1)		1820-1¾ 637 (700-1¾)	1840-2 657 (700-2)

ELEV 1183 TDZE 1183



HIRL Rwy 12-30 L
REIL Rwys 2 and 20 L
MIRL Rwy 2-20 L

NC-1, 26 DEC 2024 to 23 JAN 2025
NC-1, 26 DEC 2024 to 23 JAN 2025