# ILS or LOC RWY 18

## UNIVERSITY OF OKLAHOMA WESTHEIMER (OUN)

| LOC/DME I-BWM | APP CRS | Rwy Idg | 5199 |
|---|---|---|---|
| 111.95 | 177° | TDZE | 1182 |
| Chan 56 (Y) | | Apt Elev | 1182 |

DME required.

Ⓣ Circling NA southeast of Rwy 3-21. VDP NA when using OKC altimeter setting.
Ⓐ When local altimeter setting not received, use OKC altimeter setting: increase S-ILS 18 DA to 1423 feet; increase all MDAs 60 feet, S-LOC 18 visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM; increase JIXPU fix minimums S-LOC 18 visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM.

MALSR

MISSED APPROACH: Climbing right turn to 3100 on heading 185° and IRW VORTAC R-155 to WETIX/IRW VORTAC 22.4 DME and hold.

| AWOS-3PT | OKE CITY APP CON | WESTHEIMER TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 119.55 | 120.45 288.325 | 118.0 (CTAF) L | 121.6 | 122.95 |

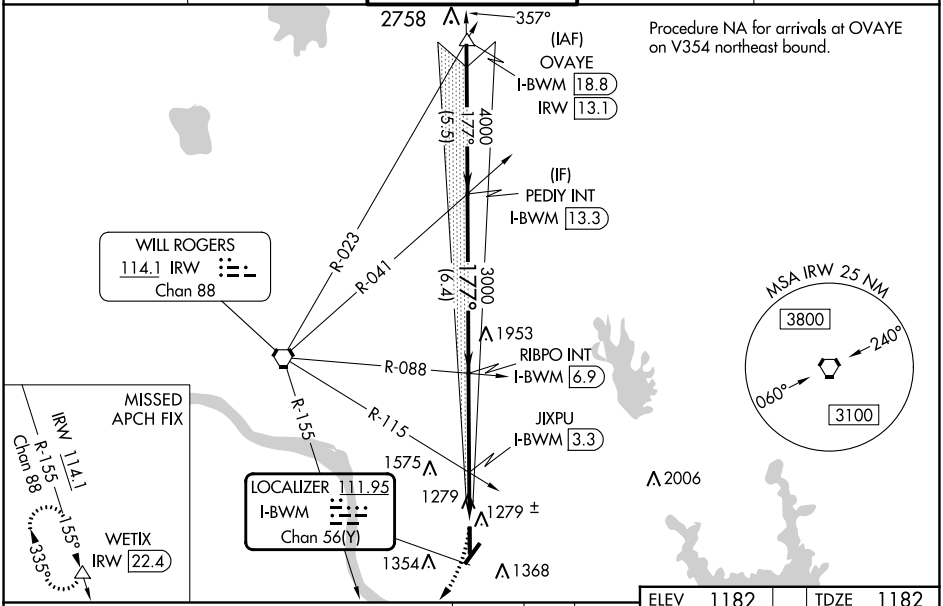


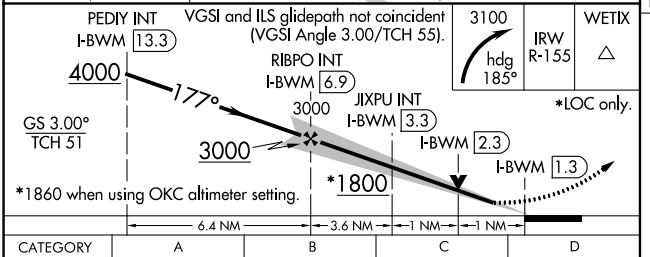


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 18 | 1382-½ | 200 (200-½) | | |
| S-LOC 18 | 1800-½ | 618 (700-½) | 1800-1⅜ | 618 (700-1⅜) |
| C CIRCLING | 1800-1 | 618 (700-1) | 1940-2¼ 758 (800-2¼) | 1940-2½ 758 (800-2½) |
| JIXPU FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) | | | | |
| S-LOC 18 | 1540-½ | 358 (400-½) | 1540-⅝ | 358 (400-⅝) |
| C CIRCLING | 1660-1 | 478 (500-1) | 1940-2¼ 758 (800-2¼) | 1940-2½ 758 (800-2½) |

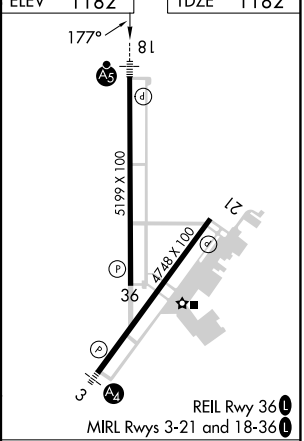


FAF to MAP 5.6 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:36 | 3:44 | 2:48 | 2:14 | 1:52 |



SC-1, 26 DEC 2024 to 23 JAN 2025
SC-1, 26 DEC 2024 to 23 JAN 2025