

ZAAPA FIVE DEPARTURE (RNAV)



EC-2, 26 DEC 2024 to 23 JAN 2025

**TOP ALTITUDE:
ASSIGNED BY ATC**

ASOS
118.925
CLNC DEL
125.7
CTAF
122.7
CLEVELAND DEP CON
125.35 346.325

TAKEOFF MINIMUMS:
Rwys 7, 25: Standard with a minimum climb of 500' per NM to 1300.

- NOTE: RADAR required.
- NOTE: RNAV 1.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

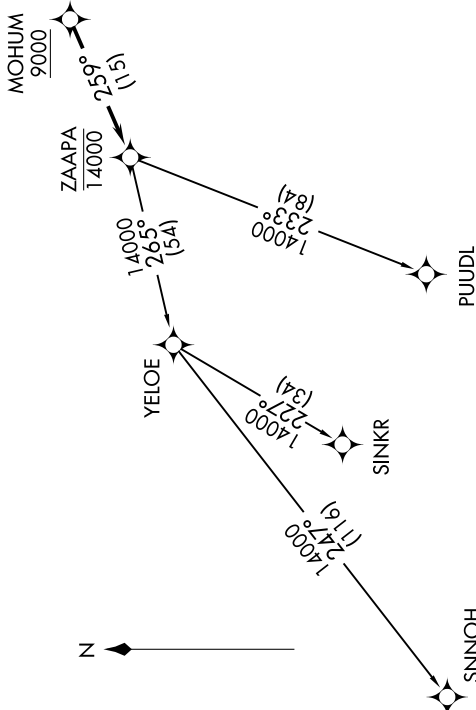

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 7: Climb on heading 073° to 1300, then on heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

TAKEOFF RUNWAY 25: Climb on heading 253° to 1300, then right turn heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

- PUUDL TRANSITION [ZAAPA5.PUUDL]
- SINKR TRANSITION [ZAAPA5.SINKR]
- SNNOH TRANSITION [ZAAPA5.SNNOH]

NOTE: Chart not to scale.

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 26 DEC 2024 to 23 JAN 2025