RNAV (GPS) RWY 24

VIRGINIA HIGHLANDS (VJI)

WAAS CH 77827 W24A	APP CRS 241°	Rwy Idg 5500 TDZE 2087 Apt Elev 2087

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 24 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1¾ SM.

ODALS

MISSED APPROACH: Climb to 2900 then climbing left turn to 7300 direct KURRU and hold, continue climb-in-hold.

AWOS-3	TRI CITY APP CON ★	UNICOM
128.125	125.25 349.0	122.8 (CTAF) L

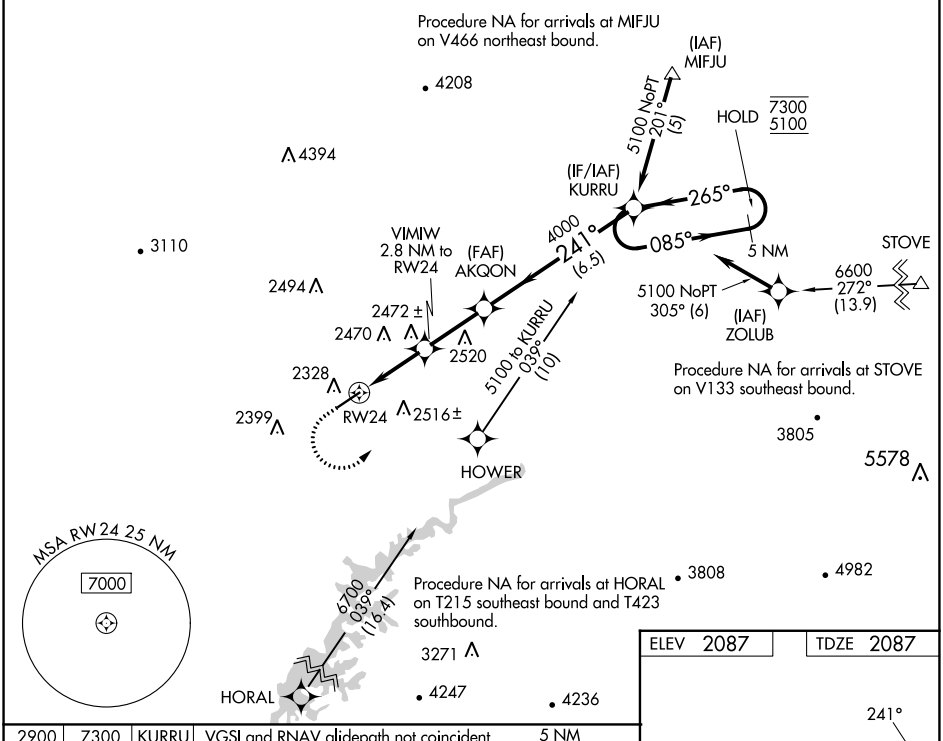

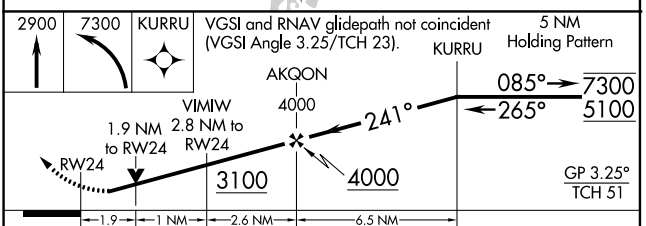



CATEGORY	A	B	C	D
LPV DA	2451-1	364 (400-1)		
LNAV/VNAV DA	2682-1⅝	595 (600-1⅝)		
LNAV MDA	2760-¾	673 (700-¾)	2760-1¾	673 (700-1¾)
C CIRCLING	2860-1	773 (800-1)	2860-2¼ 773 (800-2¼)	3080-3 993 (1000-3)

MIRL Rwy 6-24 L
REIL Rwy 6 and 24 L

NE-3, 26 DEC 2024 to 23 JAN 2025
NE-3, 26 DEC 2024 to 23 JAN 2025