RNAV (GPS) RWY 35

SHALZ FLD (CBK)

WAAS CH 81909 W35A	APP CRS 352°	Rwy Idg 5110 TDZE 3176 Apt Elev 3188

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Goodland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Goodland altimeter setting: increase LPV DA to 3511 feet and visibility ¼ SM, LNAV/VNAV DA to 3561 feet and visibility ⅜ SM; increase all MDAs 140 feet and visibility Cat C ⅜ SM.

MISSED APPROACH: Climb to 5100 direct YEBVI and hold.

AWOS-3P	DENVER CENTER	UNICOM
118.175	132.7 226.675	122.8 (CTAF) L

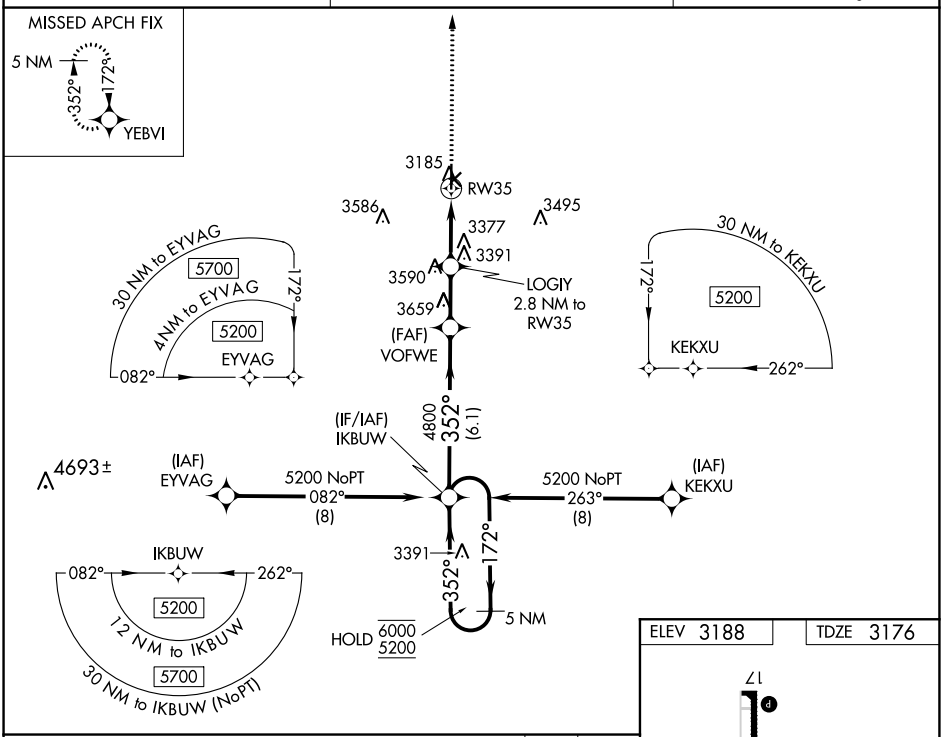

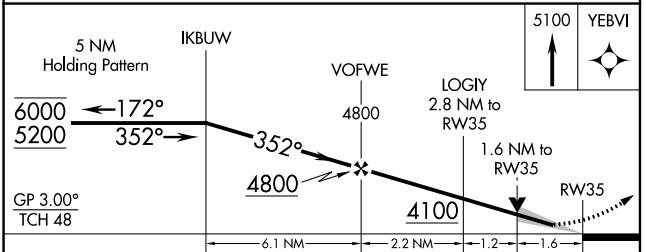

CATEGORY	A	B	C	D
LPV DA	3376-¾	200 (200-¾)		NA
LNAV/VNAV DA	3426-¾	250 (300-¾)		NA
LNAV MDA	3700-1	524 (600-1)	3700-1½ 524 (600-1½)	NA

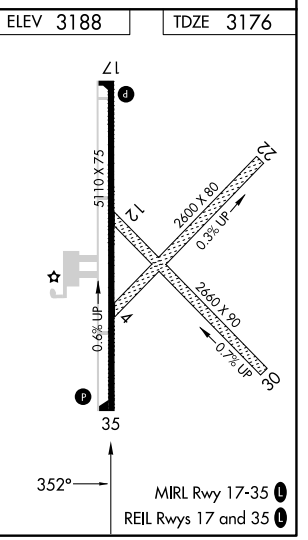

NC-2, 26 DEC 2024 to 23 JAN 2025
NC-2, 26 DEC 2024 to 23 JAN 2025