

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>50405</b><br><b>W25A</b> | APP CRS<br><b>253°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5000</b><br><b>891</b><br><b>891</b> |
|--|------------------------|-----------------------------|---|



# RNAV (GPS) RWY 25

OCONEE COUNTY RGNL (CEU)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anderson altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV all Cats, and LNAV Cat C visibility 1/8 mile; increase LNAV/VNAV all Cats visibility 1/4 mile. Baro-VNAV and VDP NA when using Anderson altimeter setting.

**MISSED APPROACH:** Climb to 3000 direct ZEYLM and hold.

|                        |  |                                 |
|------------------------|--|---------------------------------|
| ASOS<br><b>119.275</b> | GREER APP CON★<br><b>118.8 270.275</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|------------------------|--|---------------------------------|

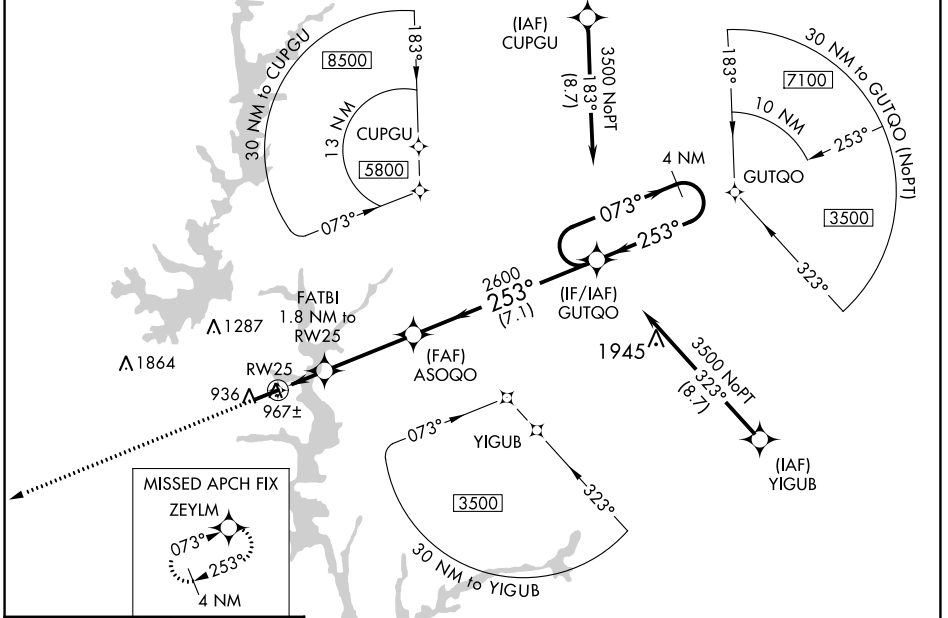

|          |          |
|----------|----------|
| ELEV 891 | TDZE 891 |
|----------|----------|

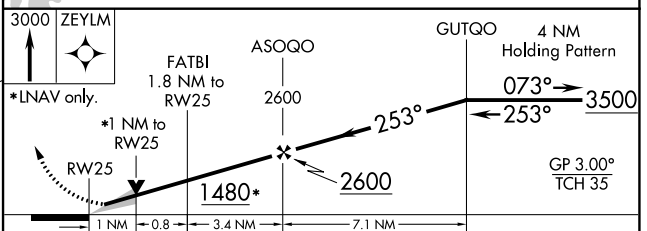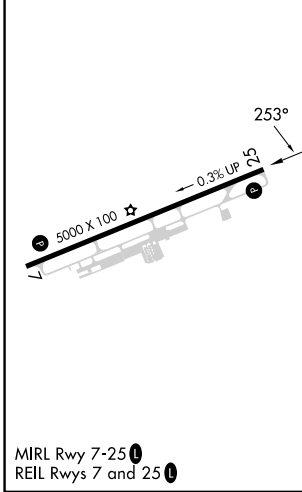

|                   | A                     | B                     | C                             | D  |
|-------------------|-----------------------|-----------------------|-------------------------------|----|
| LPV DA            | 1091-3/4              | 200 (200-3/4)         |                               | NA |
| LNAV/VNAV DA      | 1141-7/8              | 250 (300-7/8)         |                               | NA |
| LNAV MDA          | 1220-1                | 329 (400-1)           |                               | NA |
| <b>C</b> CIRCLING | 1300-1<br>409 (500-1) | 1360-1<br>469 (500-1) | 1640-2 1/4<br>749 (800-2 1/4) | NA |

SE-2, 26 DEC 2024 to 23 JAN 2025

SE-2, 26 DEC 2024 to 23 JAN 2025