RNAV (GPS) RWY 22

CRAWFORDSVILLE RGNL (CFJ)

WAAS CH 60941 W22A	APP CRS 227°	Rwy Idg 5004	TDZE 799	Apt Elev 800

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Greencastle altimeter setting. When local altimeter setting not received, use Greencastle altimeter setting: increase LPV DA to 1104 feet, LNAV/VNAV DA to 1115 feet; increase all MDA 60 feet and visibility Cats C and D ¼ SM. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2700 direct YONUG and hold.

AWOS-3PT	INDIANAPOLIS APP CON	UNICOM
125.65	119.05 317.8	122.8 (CTAF) L

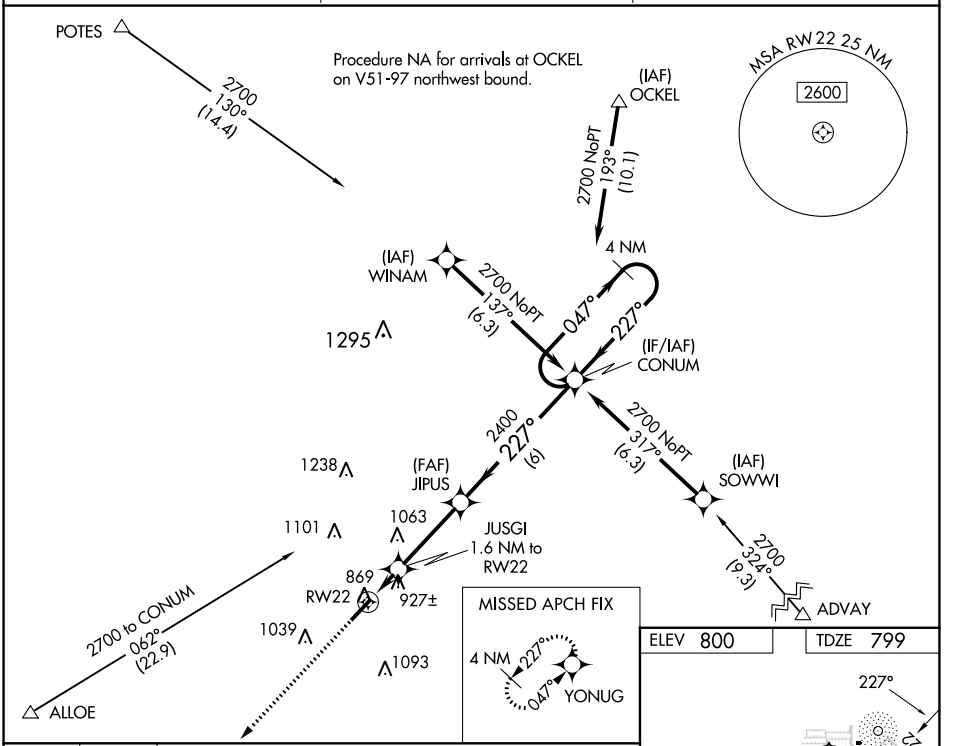

ELEV 800 TDZE 799

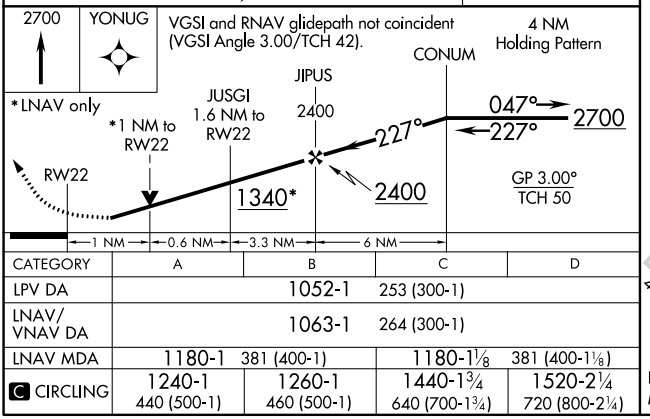

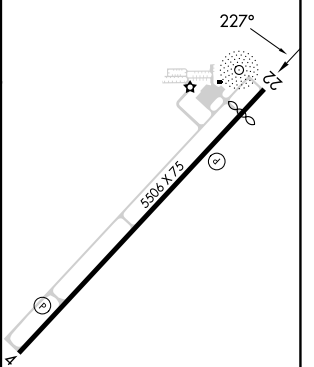

CATEGORY	A	B	C	D
LPV DA		1052-1	253 (300-1)	
LNAV/ VNAV DA		1063-1	264 (300-1)	
LNAV MDA	1180-1 381 (400-1)		1180-1⅛	381 (400-1⅛)
C CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-1¾ 640 (700-1¾)	1520-2¼ 720 (800-2¼)

REIL Rwys 4 and 22 L
MIRL Rwy 4-22 L

EC-2, 26 DEC 2024 to 23 JAN 2025
EC-2, 26 DEC 2024 to 23 JAN 2025