

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 45819 W27A | APP CRS 275° | Rwy ldg TDZE Apt Elev | 5005 752 752 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 27



FOSTORIA METRO (FZI)

RNP APCH.

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Findlay altimeter setting. When local altimeter setting not received, use Findlay altimeter setting and increase all DA 47 feet and all MDA 60 feet, increase LNAV/VNAV all Cats and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 2500 direct DAVVS and on track 224° to FBC VORTAC and hold.

| | | |
|--------------------------|--------------------------------------|---------------------------------|
| AWOS-3 124.625 | TOLEDO APP CON 126.1 307.0 | UNICOM 122.7 (CTAF) 0 |
|--------------------------|--------------------------------------|---------------------------------|

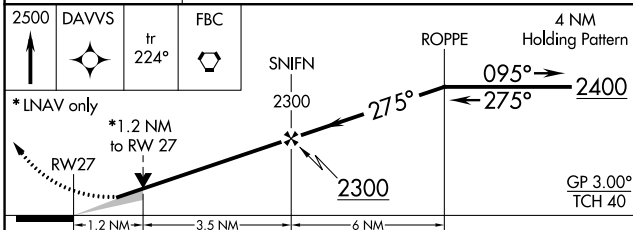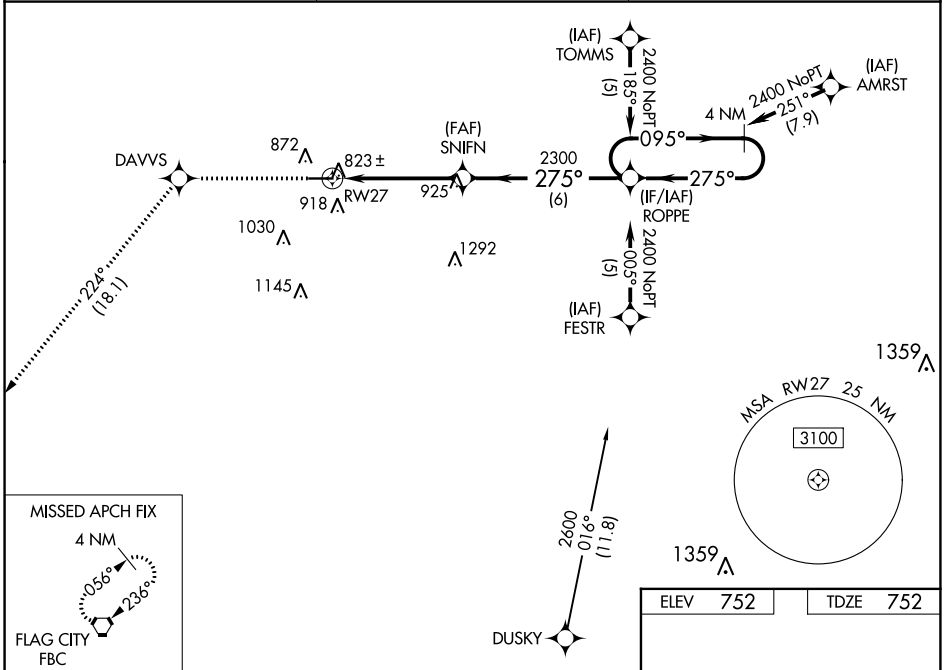

| | |
|----------|----------|
| ELEV 752 | TDZE 752 |
|----------|----------|

| CATEGORY | A | B | C | D |
|--------------|----------------------|--------------------|----------------------|----|
| LPV DA | 1002-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1131-1¼ 379 (400-1¼) | | | NA |
| LNAV MDA | 1160-1 408 (500-1) | | 1160-1¼ 408 (500-1¼) | NA |
| CIRCLING | 1280-1 528 (600-1) | 1320-1 568 (600-1) | 1400-1¾ 648 (700-1¾) | NA |

REIL Rwy 9 and 27 0
MRL Rwy 9-27 0

EC-2, 26 DEC 2024 to 23 JAN 2025

EC-2, 26 DEC 2024 to 23 JAN 2025