

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>97701</b><br><b>W10A</b> | APP CRS<br><b>100°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5003</b><br><b>857</b><br><b>868</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 10


FAIRFIELD COUNTY (L.H.Q)

RNP APCH - GPS.



**⚠** Rwy 10 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM. When Circling Rwy 28 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

**MISSED APPROACH:**  
Climb to 2800 direct  
DIPAC and hold.

|                        |  |                           |                                   |
|------------------------|--|---------------------------|-----------------------------------|
| ASOS<br><b>118.375</b> | COLUMBUS APP CON<br><b>134.0 279.6</b> | CLNC DEL<br><b>121.65</b> | UNICOM<br><b>122.725 (CTAF) 0</b> |
|------------------------|--|---------------------------|-----------------------------------|

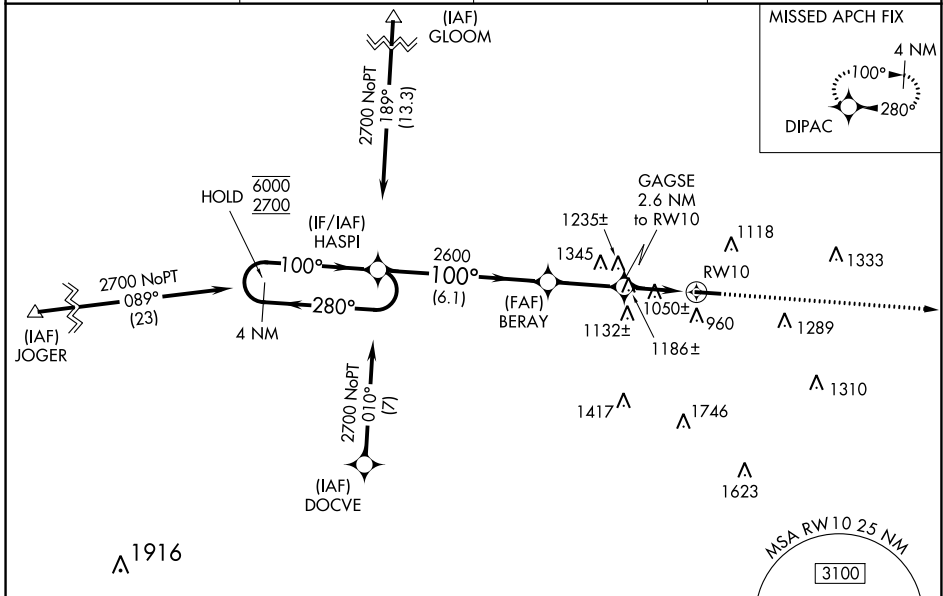

|      |     |      |     |
|------|-----|------|-----|
| ELEV | 868 | TDZE | 857 |
|------|-----|------|-----|

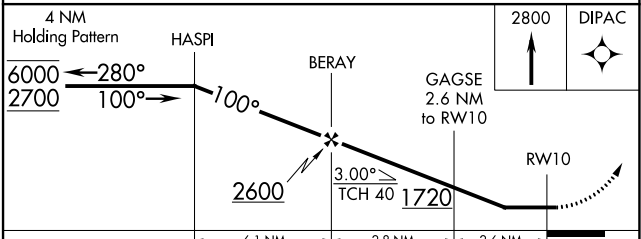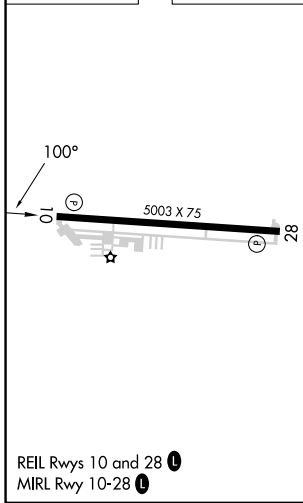

| CATEGORY | A                     | B                     | C                             | D  |
|----------|-----------------------|-----------------------|-------------------------------|----|
| LP MDA   | 1300-1                | 443 (500-1)           | 1300-1 3/8<br>443 (500-1 3/8) | NA |
| LNAV MDA | 1440-1                | 583 (600-1)           | 1440-1 3/4<br>583 (600-1 3/4) | NA |
| CIRCLING | 1500-1<br>632 (700-1) | 1540-1<br>672 (700-1) | 1620-2 1/4<br>752 (800-2 1/4) | NA |

EC-2, 26 DEC 2024 to 23 JAN 2025

EC-2, 26 DEC 2024 to 23 JAN 2025