




WAAS CH 93544 W04A	APP CRS 038°	Rwy ldg TDZE Apt Elev	4870 1240 1243
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4R

CHANDLER MUNI (CHD)

RNP APCH - GPS.		CHANDLER TOWER ★ 126.1 (CTAF) 133.1 (North and West) (South and East)	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		MISSED APPROACH: (Do not exceed 210K until DECTU) Climb to 2200 then climbing right turn to 4000 direct to DECTU and hold.	

ATIS 128.325	PHOENIX APP CON 123.7 363.0	GND CON 124.4	UNICOM 122.95
------------------------	---------------------------------------	-------------------------	-------------------------

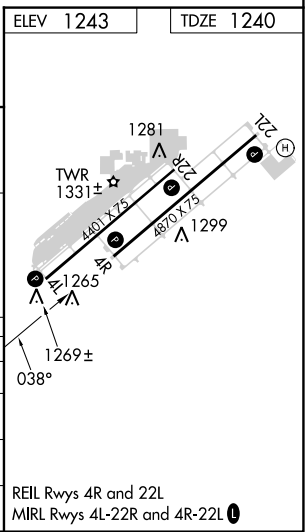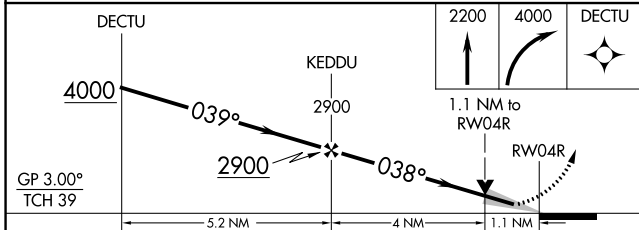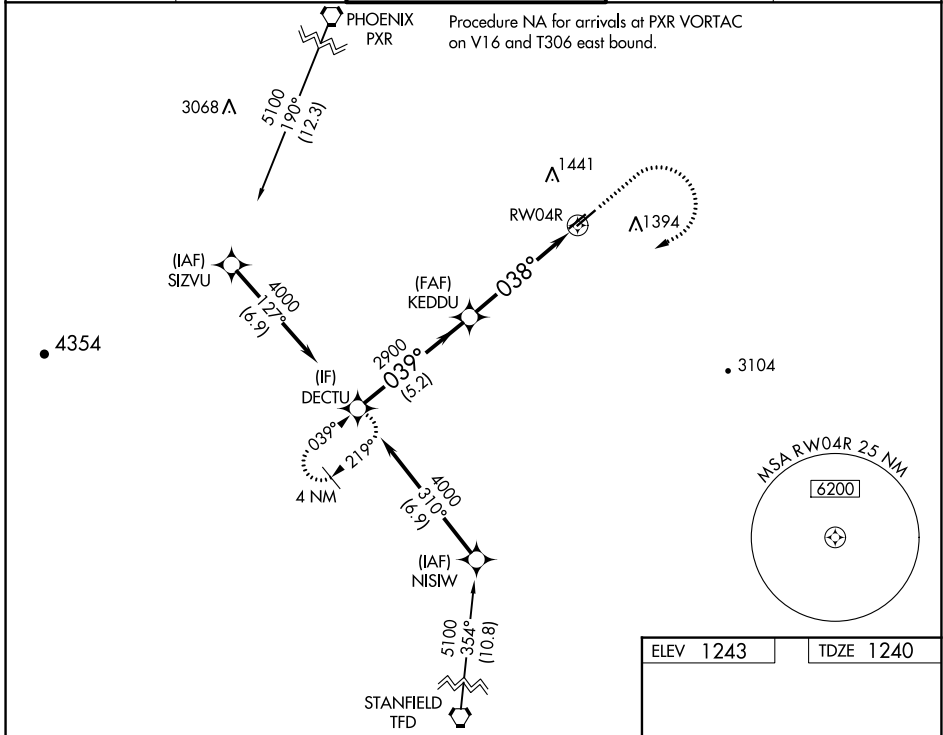

CATEGORY	A	B	C	D
LPV DA	1490-3/4	250 (300-3/4)		NA
LNAV/VNAV DA	1640-1 1/8	400 (400-1 1/8)		NA
LNAV MDA	1640-1	400 (400-1)	1640-1 1/8 400 (400-1 1/8)	NA
CIRCLING	1700-1 457 (500-1)	1760-1 517 (600-1)	1760-1 1/2 517 (600-1 1/2)	NA

SW-4, 26 DEC 2024 to 23 JAN 2025

SW-4, 26 DEC 2024 to 23 JAN 2025