

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 58319 W34A | APP CRS 344° | Rwy Idg TDZE Apt Elev | 6000 100 100 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 34


YOLO COUNTY (DWA)

RNP APCH.



NA When local altimeter setting not received, use Travis AFB altimeter setting and increase all DA 50 feet and all MDA 60 feet, and increase LPV visibility all Cats 1/8 mile, LNAV/VNAV visibility all Cats 1/4 mile, and LNAV Cat C and D visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). Baro-VNAV NA when using Travis AFB altimeter setting.

MISSED APPROACH: Climb to 3000 direct GHEER and hold.

| | | |
|---------------------------|---------------------------------------|-------------------------------|
| AWOS-3P 125.775 | TRAVIS APP CON 126.6 281.45 | UNICOM 123.0 (CTAF) |
|---------------------------|---------------------------------------|-------------------------------|

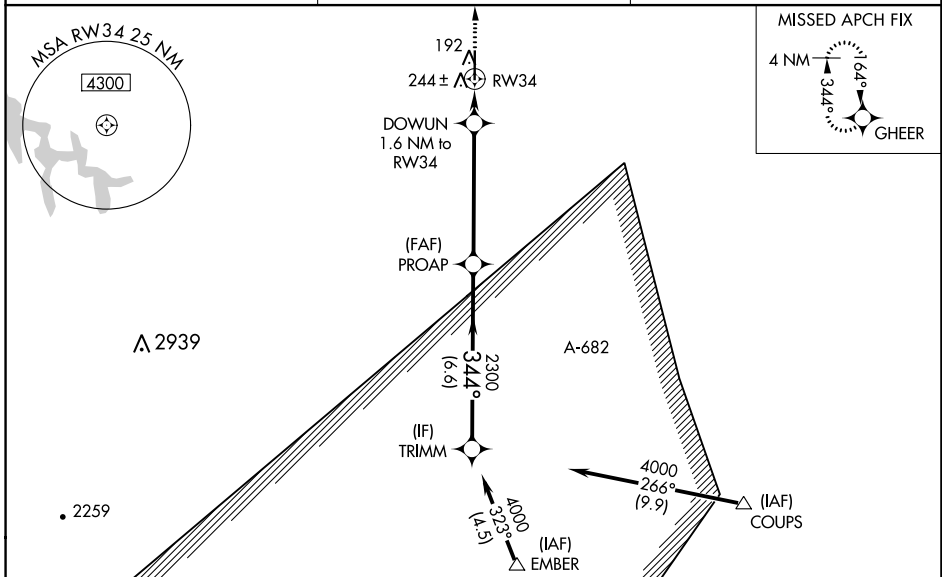

| | |
|----------|----------|
| ELEV 100 | TDZE 100 |
|----------|----------|

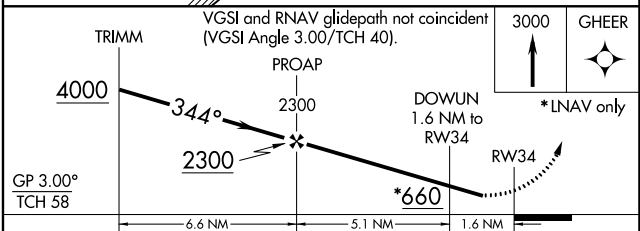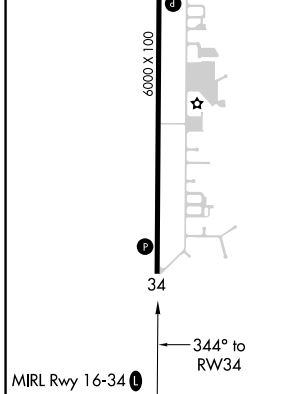

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|-------------|-----------------|
| LPV DA | | 415-1 | 315 (400-1) | |
| LNAV/VNAV DA | | 425-1 | 325 (400-1) | |
| LNAV MDA | 500-1 | 400 (400-1) | 500-1 1/8 | 400 (400-1 1/8) |

SW-2, 26 DEC 2024 to 23 JAN 2025

SW-2, 26 DEC 2024 to 23 JAN 2025