

WAAS CH 90532 W29A	APP CRS 286°	Rwy Idg TDZE Apt Elev	3602 120 121
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29


NEW KENT COUNTY (W96)

RNP APCH - GPS.

⚠ Rwy 29 helicopter visibility reduction below 1 SM NA. Procedure NA at night. When local altimeter setting not received, use RIC altimeter setting: increase all MDAs 40 feet and LNAV visibility Cat C ½ SM; increase LP and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 900 then climbing left turn to 2000 direct WINVO and hold.

AWOS-3 119.875	POTOMAC APP CON 126.4 282.375	UNICOM 122.8 (CTAF) ①
--------------------------	---	---------------------------------

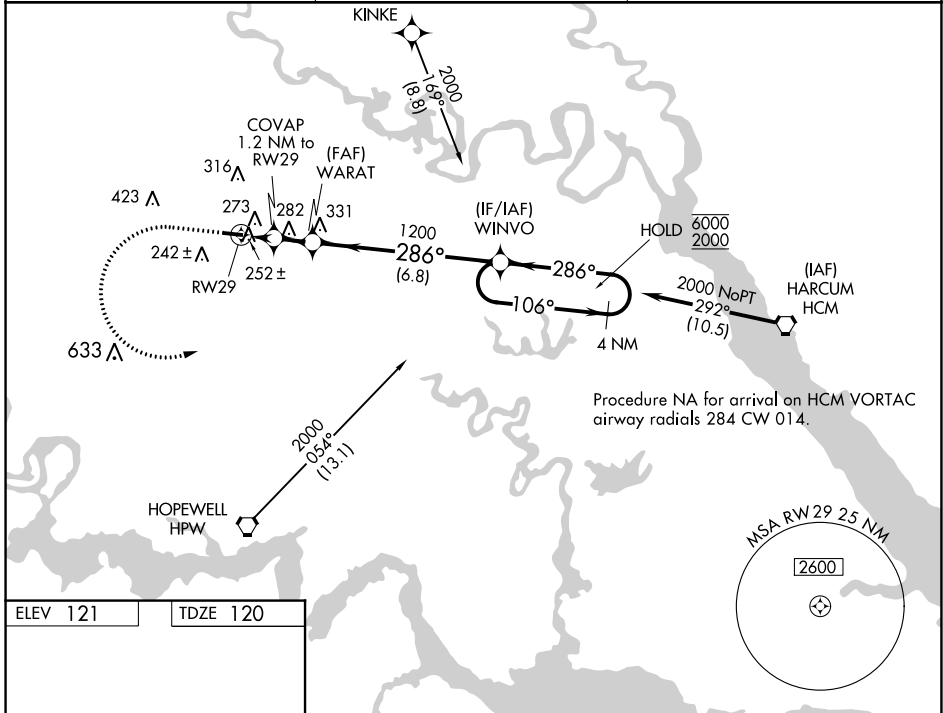

ELEV 121	TDZE 120
----------	----------

MIRL Rwy 11-29 ①
REIL Rwy 11 and 29 ①

900	2000	WINVO	VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 45).	4 NM Holding Pattern
CATEGORY	A	B	C	D
LP MDA	540-1	420 (500-1)	540-1 1/8 420 (500-1 1/8)	NA
LNAV MDA	560-1	440 (500-1)	560-1 1/4 440 (500-1 1/4)	NA
C CIRCLING	620-1	499 (500-1)	760-1 3/4 639 (700-1 3/4)	NA

NE-3, 26 DEC 2024 to 23 JAN 2025

NE-3, 26 DEC 2024 to 23 JAN 2025