

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 77905 W23A | APP CRS 234° | Rwy Idg TDZE Apt Elev | 7300 7143 7143 |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FLD (E V W)

| | | |
|--|-----------|---|
| RNP APCH - GPS. | MALSR | MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000. |
| For inoperative MALSR, increase LPV all Cats visibility to 1, LNAV/VNAV Cat D to 1 and LNAV Cat D to 1¼. When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C or above 34°C. | | |

| | | | |
|----------------------|--|----------------------|-------------------------------|
| ASOS 120.0 | SALT LAKE CENTER 127.7 354.125 | GCO 121.72 | UNICOM 123.0 (CTAF) |
|----------------------|--|----------------------|-------------------------------|

Procedure NA for arrivals at FBR VOR/DME via airway radials 213 CW 285.

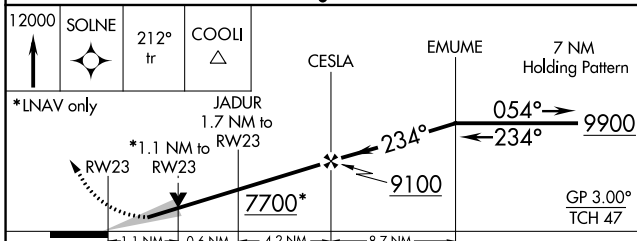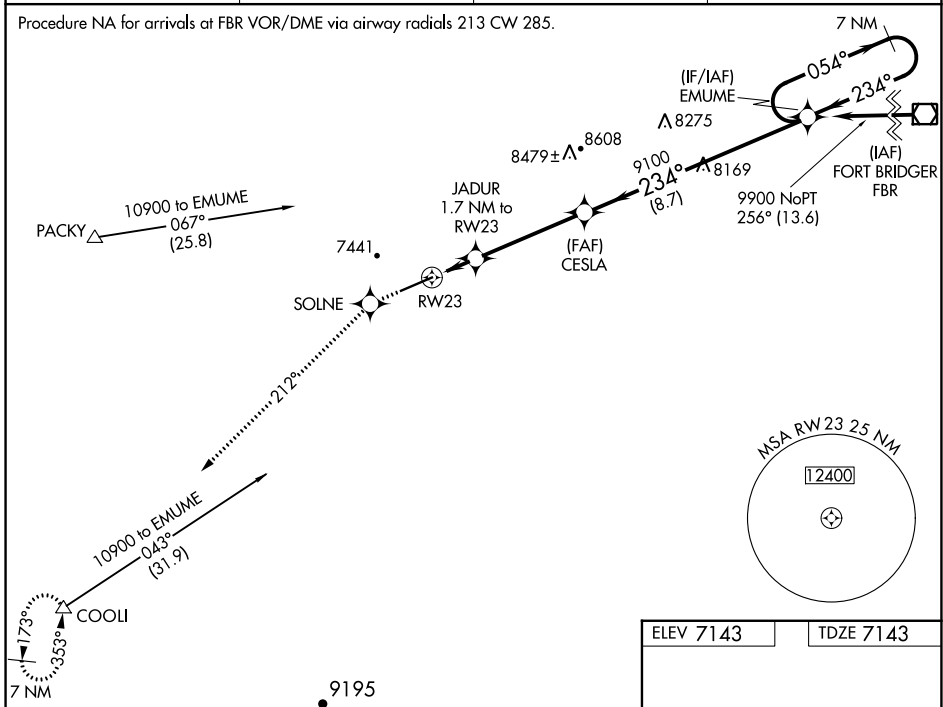

| | |
|-----------|-----------|
| ELEV 7143 | TDZE 7143 |
|-----------|-----------|

REIL Rwy 5
HIRL Rwy 5-23

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| LPV DA | 7393-1/2 | | 250 (300-1/2) | |
| LNAV/VNAV DA | 7443-1/2 | | 300 (300-1/2) | |
| LNAV MDA | 7520-1/2 | | 377 (400-1/2) | |
| CIRCLING | 7680-1 537 (600-1) | 7760-1 617 (700-1) | 7800-1 3/4 657 (700-1 3/4) | 8000-2 3/4 857 (900-2 3/4) |

NW-1, 26 DEC 2024 to 23 JAN 2025

NW-1, 26 DEC 2024 to 23 JAN 2025