

WAAAS CH 93632 W10A	APP CRS 100°	Rwy Idg TDZE 928 Apt Elev 928	4549
-----------------------------------------	------------------------	---------------------------------------------------	-------------

RNAV (GPS) RWY 10

BOGGS FLD (USW)


RNP APCH.

▼ Circling Rwy 28 NA at night. Baro-VNAV and VDP NA when using Charleston altimeter setting. Rwy 10 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C . When local altimeter setting not received, use Charleston altimeter setting, increase LPV DA to 1247 feet, LNAV/VNAV DA to 1730 feet, and LNAV/VNAV visibility all Cats by $\frac{1}{2}$ SM; increase all MDAs 80 feet and LNAV visibility Cat B $\frac{1}{4}$ SM and Cat C and D $\frac{1}{2}$ SM, and Circling visibility Cats C and D by $\frac{1}{4}$ SM.

▲ NA

MISSED APPROACH: Climb to 3200 direct RAPGE and hold.


AWOS-3 118.575	CHARLESTON APP CON 124.1 269.125	UNICOM 122.725 (CTAF) 0
--------------------------	--------------------------------------------	-----------------------------------

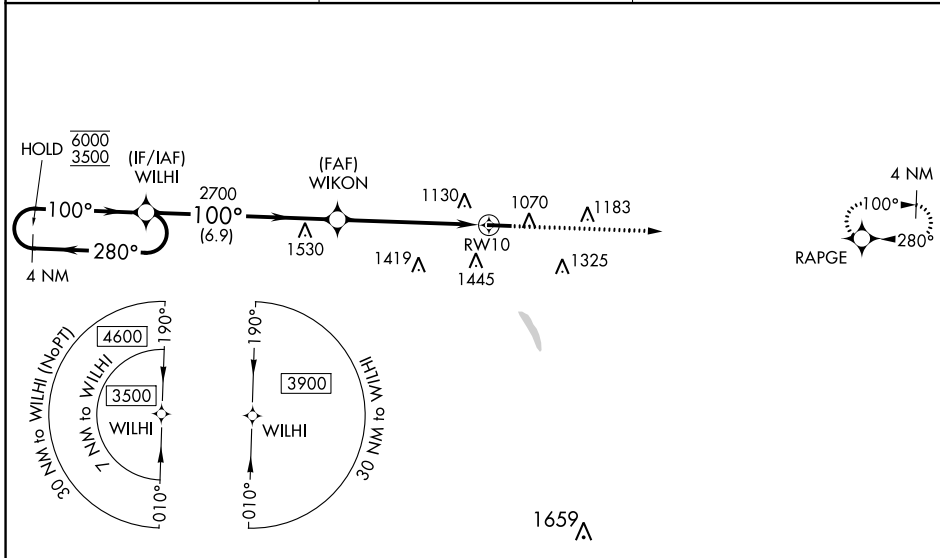

NE-4, 26 DEC 2024 to 23 JAN 2025

NE-4, 26 DEC 2024 to 23 JAN 2025

ELEV 928	TDZE 928
----------	----------

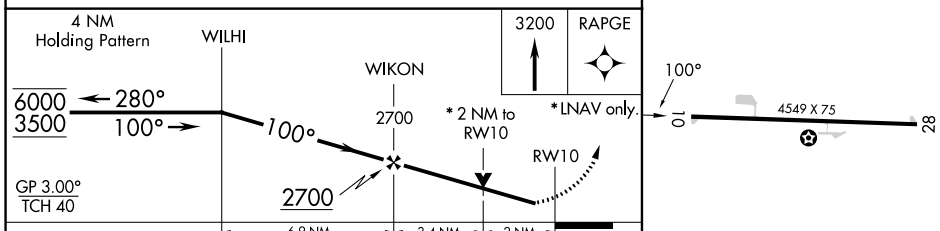

CATEGORY	A	B	C	D
LPV DA		1178-1	250 (300-1)	
LNAV/VNAV DA		1661-2	733 (800-2)	
LNAV MDA	1620-1	692 (700-1)	1620-2	692 (700-2)
C CIRCLING	1620-1 692 (700-1)	1760-1 $\frac{1}{4}$ 832 (900-1 $\frac{1}{4}$)	1760-2 $\frac{1}{2}$ 832 (900-2 $\frac{1}{2}$)	1760-2 $\frac{3}{4}$ 832 (900-2 $\frac{3}{4}$)

MIRL Rwy 10-28 0