DAYTON, OHIO

ILS or LOC RWY 5L

LOC I-FAE	APCH CRS	Rwy Idg 12,600 TDZE 803 Arpt Elev 823
109.7	053°	

[USAF] WRIGHT-PATTERSON AFB (KFFO)

DME or RADAR required for Localizer.

▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile.

ALSF-1

†MISSED APPROACH: Climb to 2000 via FFO R-053 at 5 DME, turn right direct CLACK climbing to 3100 and hold.

ATIS	COLUMBUS APP CON	PATTERSON TOWER	GND CON
124.475 269.9	118.85 269.275	127.8 281.45	121.8 335.8

** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1⅜ miles.

*** When Rwy 23R VGSI inop, circling to Rwy 23R NA at night.

†Missed approach requires use of RNAV or ATC RADAR monitoring.

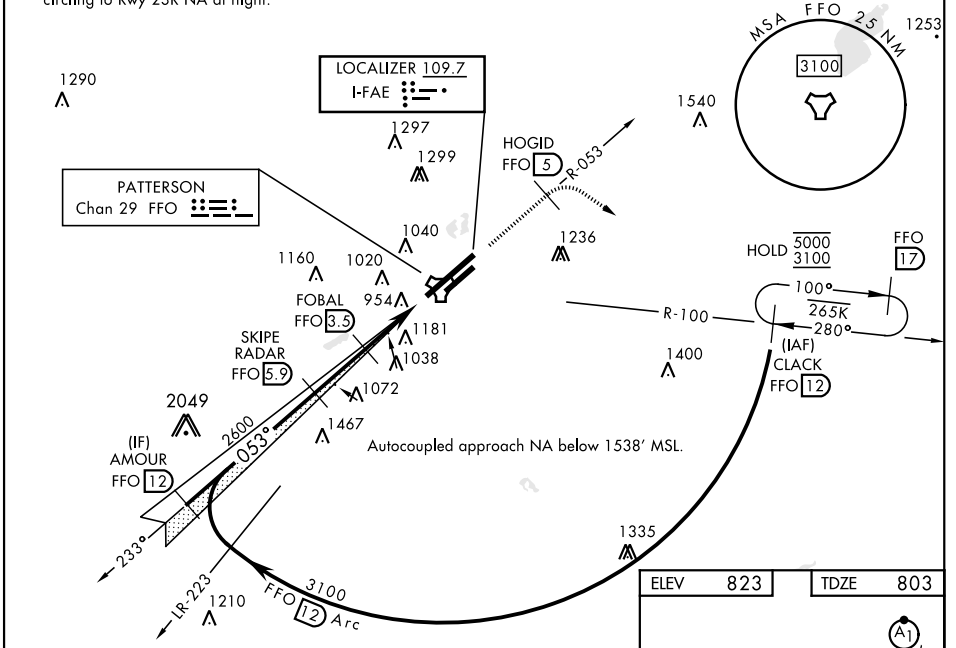

EMERG SAFE ALT 100 NM 3700

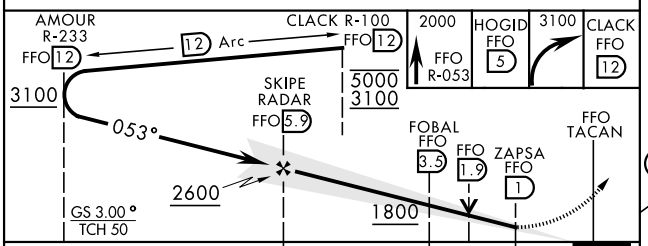



CATEGORY	A	B	C	D	E
S-ILS 5L *	1003/24 200 (200-½)				
S-LOC 5L **	1280/24 476 (500-½)		1280/50 476 (500-1)		
CIRCLING ***	1380-1 557 (600-1)	1440-1 617 (700-1)	1560-2 737 (800-2)	1620-2½ 797 (800-2½)	1620-2¾ 797 (800-2¾)

HIRL Rwy 5L-23R
MIRL Rwy 5R-23L
1038

FAF to MAP 4.9 NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

DAYTON, OHIO
Amdt 4 28DEC23

39° 50'N-84° 03'W

WRIGHT-PATTERSON AFB (KFFO)

ILS or LOC RWY 5L

EC-2, 23 JAN 2025 to 20 FEB 2025
EC-2, 23 JAN 2025 to 20 FEB 2025