


| | | |
|--|------------------------|---|
| WAAS CH 53412 W34A | APP CRS 344° | Rwy Idg 7455 TDZE 680 Apt Elev 710 |
|--|------------------------|---|

RNAV (GPS) RWY 34



FORT WORTH MEACHAM INTL (FTW)

| | | |
|---|----------|---|
| ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D and LNAV Cat D visibility to 1½ mile. | MALS | MISSED APPROACH: Climb to 3000 direct WOROD and hold. |
|---|----------|---|

| | | | | |
|----------------------|--|-------------------------------------|-------------------------|---------------------------|
| ATIS 120.7 | LONE STAR APP CON (North) 118.1 306.95 (South) 135.975 379.9 | MEACHAM TOWER 118.3 257.8 | GND CON 121.9 | CLNC DEL 124.65 |
|----------------------|--|-------------------------------------|-------------------------|---------------------------|

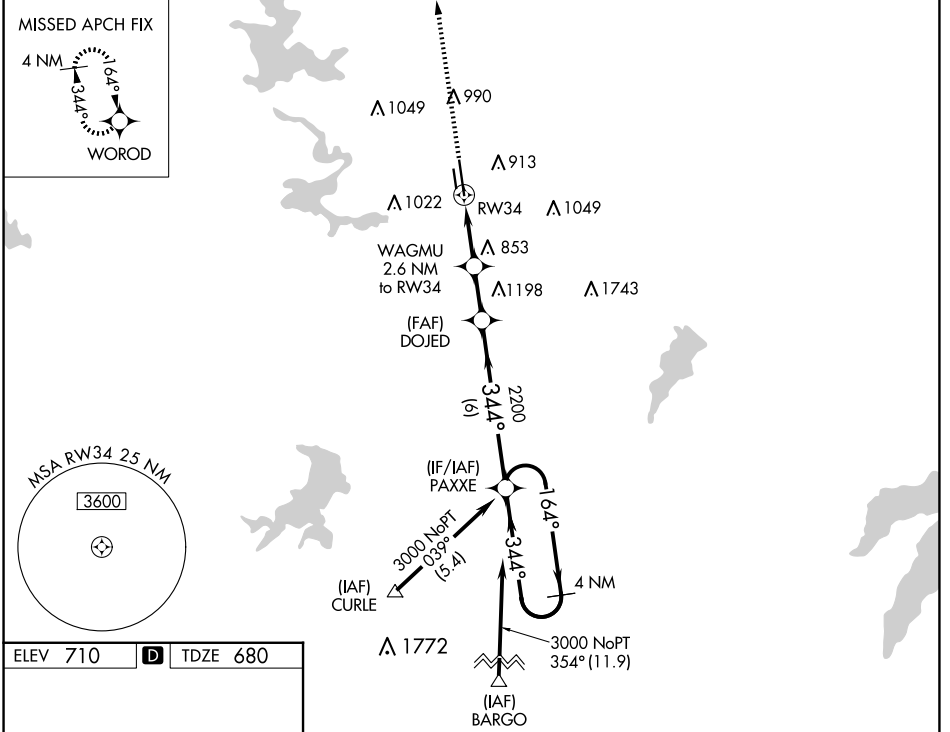

| | | |
|----------|----------|----------|
| ELEV 710 | D | TDZE 680 |
|----------|----------|----------|

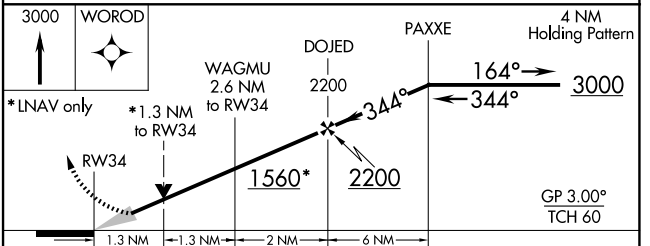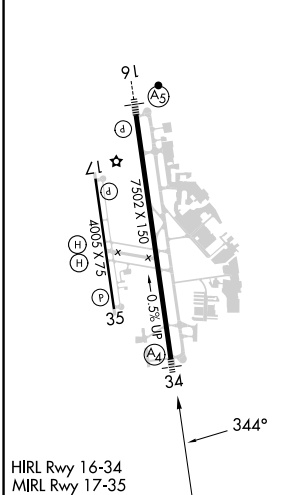

| | | | | |
|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| CATEGORY | A | B | C | D |
| LPV DA | | 880-¾ | 200 (200-¾) | |
| LNAV/VNAV DA | | 1091-1½ | 411 (400-1½) | |
| LNAV MDA | 1160-¾ | 480 (500-¾) | 1160-1½ | 480 (500-1½) |
| C CIRCLING | 1260-1 550 (600-1) | 1280-1 570 (600-1) | 1340-1¾ 630 (700-1¾) | 1500-2½ 790 (800-2½) |

SC-2, 23 JAN 2025 to 20 FEB 2025

SC-2, 23 JAN 2025 to 20 FEB 2025