

WAAS CH <b>49137</b> W10A	APP CRS <b>096°</b>	Rwy Idg TDZE Apt Elev	<b>3463</b> <b>1013</b> <b>1048</b>
---------------------------------	------------------------	-----------------------------	---

# RNAV (GPS) RWY 10



GREENVILLE DOWNTOWN (GMU)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Green altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and Circling Cat C visibility 1/4 mile.

**MISSED APPROACH:** Climb to 3700 direct JADOT and hold.

ATIS ★ <b>127.075</b>	GREER APP CON ★ <b>118.8 270.275</b>	GREENVILLE TOWER ★ <b>119.9 (CTAF) 0 257.7</b>	GND CON <b>121.25</b>	UNICOM <b>122.95</b>
--------------------------	---	---	--------------------------	-------------------------



2539 **Δ**

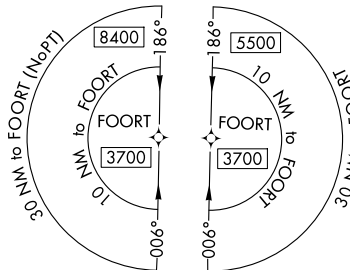

SE-2, 23 JAN 2025 to 20 FEB 2025

SE-2, 23 JAN 2025 to 20 FEB 2025

ELEV 1048	<b>D</b>	TDZE 1013
-----------	----------	-----------

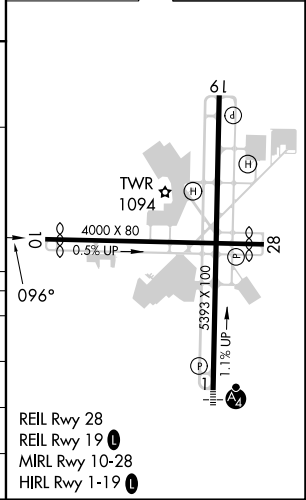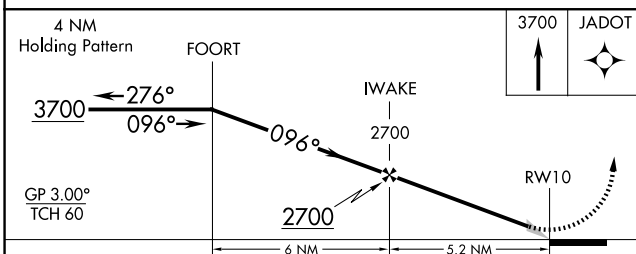

CATEGORY	A	B	C	D
LPV DA	1269-1 256 (300-1)			
LNAV/VNAV DA	1351-1 1/8 338 (400-1 1/8)			
LNAV MDA	1580-1 567 (600-1)		1580-1 1/8 567 (600-1 1/8)	
<b>C</b> CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2) 1860-2 3/4 812 (900-2 3/4)	

REIL Rwy 28  
REIL Rwy 19  
MIRL Rwy 10-28  
HIRL Rwy 1-19 **0**