
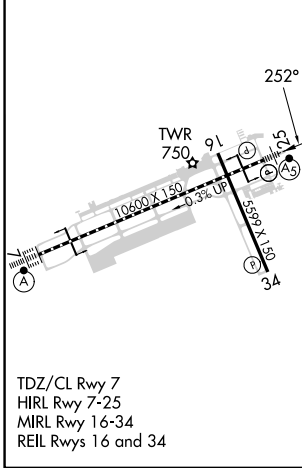


WAAS CH <b>48899</b> <b>W25A</b>	APP CRS <b>252°</b>	Rwy Idg TDZE <b>678</b> Apt Elev <b>683</b>	<b>10599</b> <b>678</b> <b>683</b>
--	------------------------	---	--

# RNAV (GPS) RWY 25

EUGENE F KRANZ TOLEDO EXPRESS (TOL)

RNP APCH.		MALSR		MISSED APPROACH: Climb to 3000 direct ATVIY and hold.	
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 52°C. For inoperative ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½ SM, LNAV Cat D/E visibility to RVR 6000. ▲ ASR ** RVR 1800 authorized with the use of FD or AP or HUD to DA.</p>					
ATIS <b>118.75 290.225</b>	TOLEDO APP CON <b>134.35 317.55</b>	TOLEDO TOWER <b>118.1 285.4</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>121.75 348.6</b>	

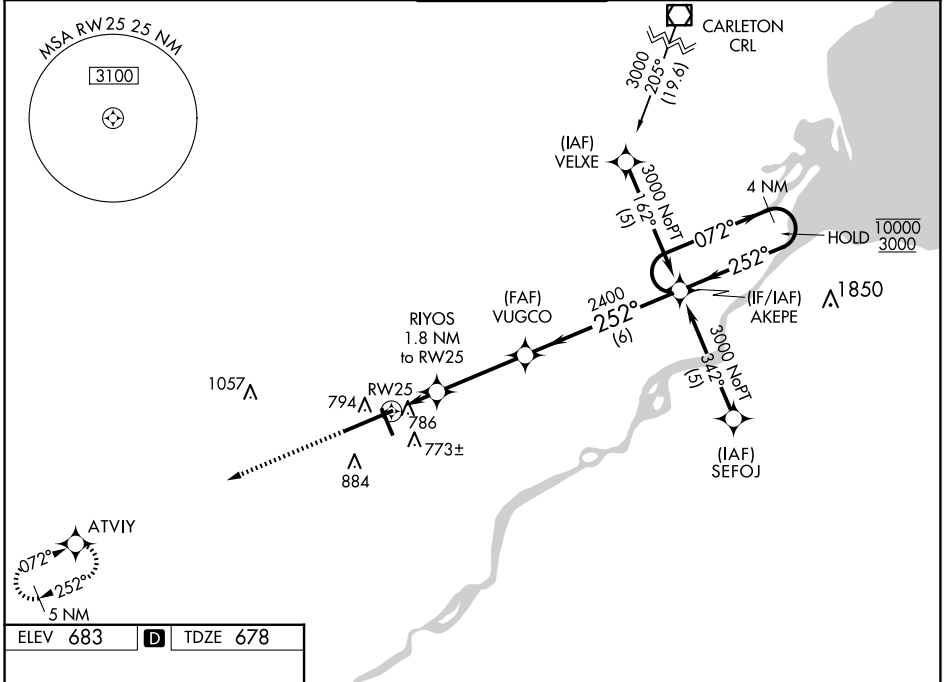

3000 ATVIY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).		4 NM Holding Pattern	
*LNAV only.		RYOS 1.8 NM to RW25	VUGCO 2400	AKEPE	10000 / 3000
RW25		*1 NM to RW25	*1280	2400	GP 3.00° TCH 52
-1 NM - 0.8 - 3.4 NM - 6 NM					
CATEGORY	A	B	C	D	E
LPV DA**	878/24		200 (200-½)		
LNAV/VNAV DA	1065/50		387 (400-1)		
LNAV MDA	1040/24		362 (400-½)		1040/50 362 (400-1)
<input checked="" type="checkbox"/> CIRCLING	1200-1 517 (600-1)		1300-1¾ 617 (700-1¾)	1360-2¼ 677 (700-2¼)	1360-2½ 677 (700-2½)

EC-2, 23 JAN 2025 to 20 FEB 2025

EC-2, 23 JAN 2025 to 20 FEB 2025