

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>90411</b><br><b>W04A</b> | APP CRS<br><b>046°</b> | Rwy Idg <b>7976</b><br>TDZE <b>258</b><br>Apt Elev <b>266</b> |
|--|------------------------|---|

# RNAV (GPS) RWY 4L

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)



**RNP APCH.**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 4L helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase LNAV Cat A and B visibility to RVR 5000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.



**MISSED APPROACH:** Climb to 2900 direct ODXIH and on track 052° to BRAUM and hold.



|                         |   |                                   |                               |                           |
|-------------------------|---|-----------------------------------|-------------------------------|---------------------------|
| D-ATIS<br><b>125.65</b> | LITTLE ROCK APP CON<br><b>135.4 353.6</b> | ADAMS TOWER<br><b>118.7 257.8</b> | GND CON<br><b>121.9 339.8</b> | CLNC DEL<br><b>118.95</b> |
|-------------------------|---|-----------------------------------|-------------------------------|---------------------------|

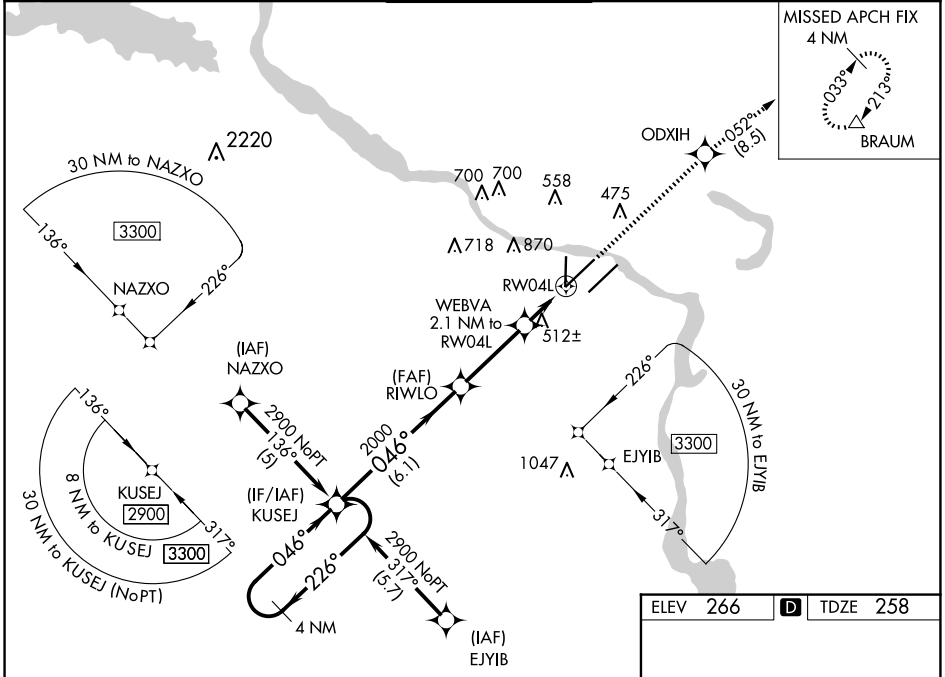

SC-1, 23 JAN 2025 to 20 FEB 2025

SC-1, 23 JAN 2025 to 20 FEB 2025

|          |          |          |
|----------|----------|----------|
| ELEV 266 | <b>D</b> | TDZE 258 |
|----------|----------|----------|

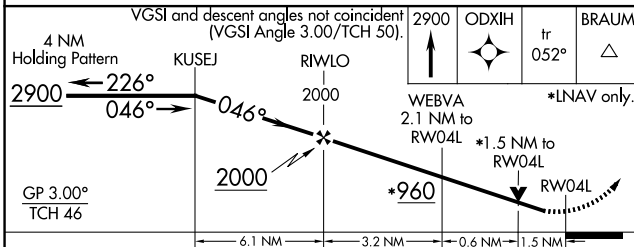

| CATEGORY          | A                    | B                     | C                              | D                      |
|-------------------|----------------------|-----------------------|--------------------------------|------------------------|
| LPV DA            |                      | 544/40                | 286 (300-3/4)                  |                        |
| LNAV/VNAV DA      |                      | 824-1 1/2             | 566 (600-1 1/2)                |                        |
| LNAV MDA          | 780/40               | 522 (600-3/4)         | 780/55                         | 522 (600-1)            |
| <b>C</b> CIRCLING | 820-1<br>554 (600-1) | 1000-1<br>734 (800-1) | 1180-2 3/4<br>914 (1000-2 3/4) | 1180-3<br>914 (1000-3) |

MIRL Rwy 18-36  
HIRL Rwy 4R-22L and 4L-22R  
TDZ/CL Rwy 22R