LOC/DME I-ROW	APP CRS	Rwy Idg	13000
109.9	215°	TDZE	3633
Chan 36		Apt Elev	3671

ILS Z or LOC Z RWY 21

ROSWELL AIR CENTER (ROW)

ADF or DME required.

VDP NA when using Artesia altimeter setting. When local altimeter setting not received, use Artesia altimeter setting: increase DA to 3913 feet; increase all MDAs 80 feet and S-LOC 21 visibility Cat C/D ⅜ SM and Circling visibility Cat D 1¼ SM. For inop ALS when using Artesia altimeter setting, increase ILS all Cats visibility to ⅞ SM and LOC Cats C/D to 1⅜ SM.

ASR

MALSR

MISSED APPROACH: Climb to 5000 then climbing right turn to 6000 on CME VORTAC R-195 to CME VORTAC and hold, continue climb-in-hold to 6000.

ATIS	ROSWELL APP CON★	ROSWELL TOWER★	GND CON	CLNC DEL	UNICOM
128.45 306.2	119.6 239.0	118.5 (CTAF) L 233.7	121.9 348.6	132.875 282.25	122.95

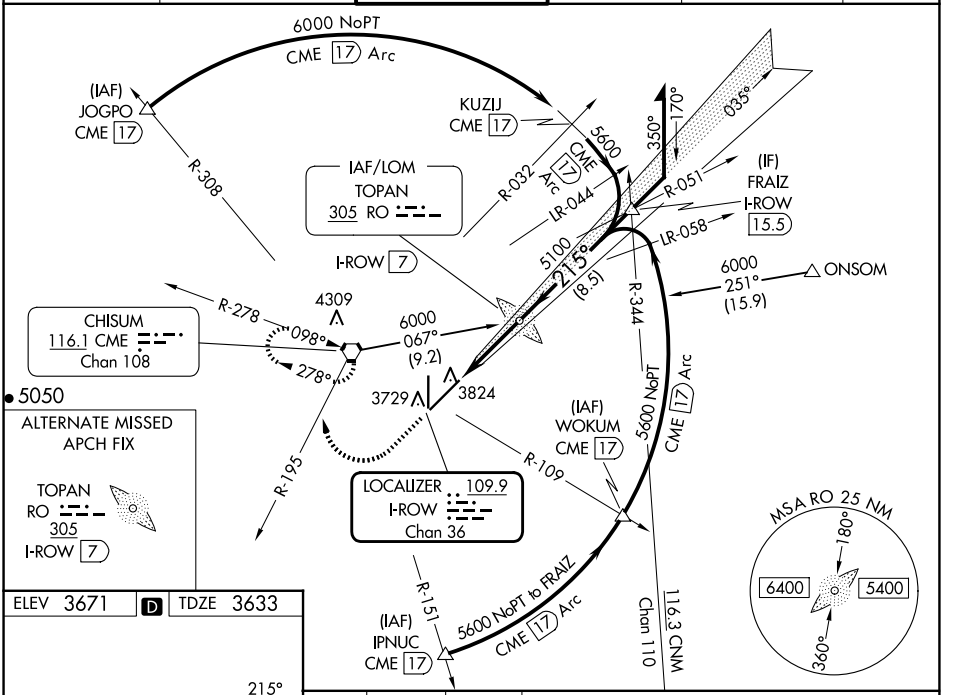

ELEV 3671 D TDZE 3633



MIRL Rwy 3-21
MIRL Rwy 17-35 L

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

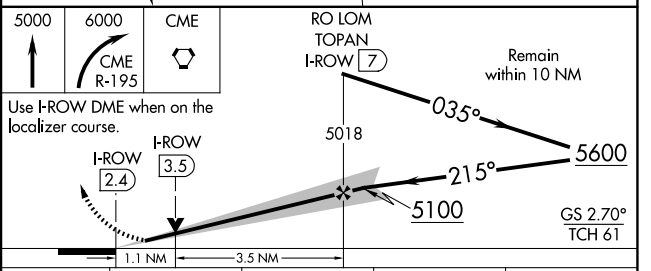

CATEGORY	A	B	C	D
S-ILS 21	3833-½ 200 (200-½)			
S-LOC 21	4020-½ 387 (400-½)		4020-⅝ 387 (400-⅝)	
C CIRCLING	4140-1 469 (500-1)		4140-1½ 469 (500-1½)	4300-2 629 (700-2)

SW-1, 23 JAN 2025 to 20 FEB 2025
SW-1, 23 JAN 2025 to 20 FEB 2025