WAAS	APP CRS	Rwy Idg	7276
CH 69411	298°	TDZE	22
W30A		Apt Elev	24

RNAV (GPS) RWY 30L

VERO BEACH RGNL (VRB)

Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using Fort Pierce altimeter setting. When local altimeter setting not received, use Fort Pierce altimeter setting and increase all DA 23 feet and all MDA 40 feet and increase LNAV/VNAV all Cats visibility ⅛ mile LNAV Cats C/D and Circling visibility Cats C/D ¼ mile.

MISSED APPROACH: Climb to 2000 direct HOCKI and hold.

ATIS	PALM BEACH APP CON	VERO BEACH TOWER ★	GND CON	CLNC DEL	UNICOM
120.575	123.625 225.4	126.3 (CTAF) L	127.45	134.975	122.95

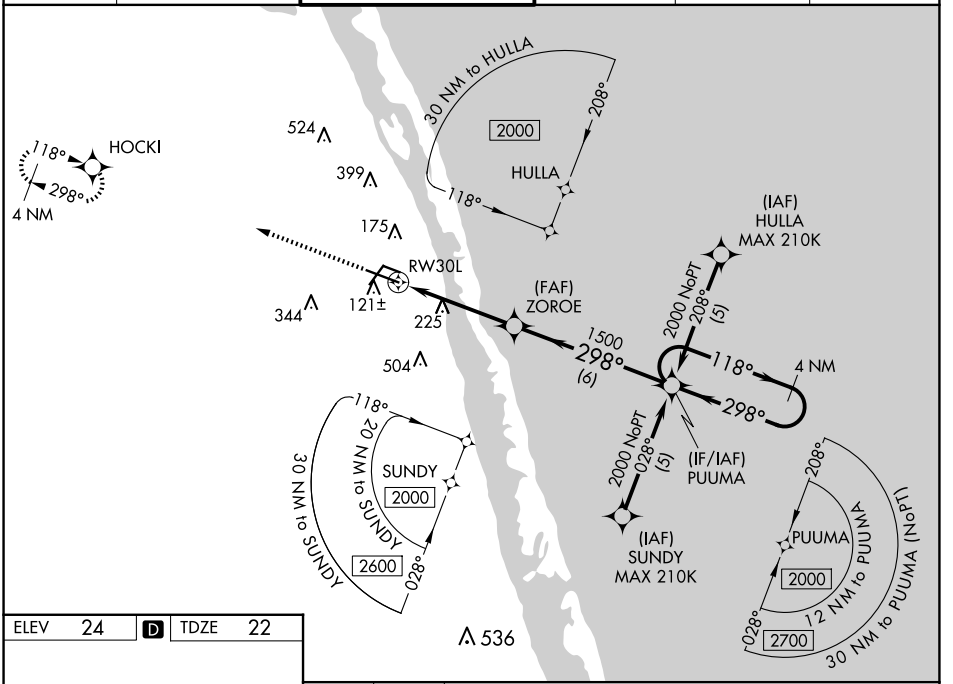



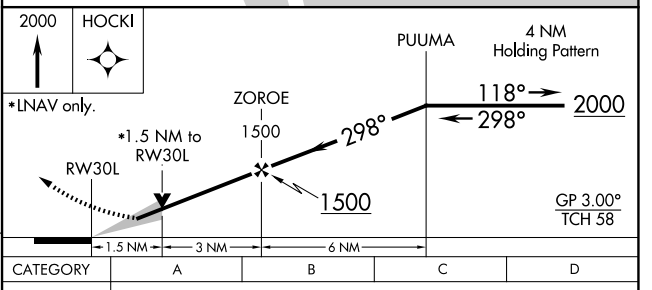

CATEGORY	A	B	C	D
LPV DA	222-¾	200 (200-¾)		
LNAV/VNAV DA	346-1	324 (400-1)		
LNAV MDA	540-1	518 (600-1)	540-1⅜	518 (600-1⅜)
CIRCLING	560-1	536 (600-1)	660-1¾ 636 (700-1¾)	820-2½ 796 (800-2½)

MIRL Rwys 4-22, 12R-30L, and 12L-30R L
REIL Rwys 4, 12R, 22 and 30L L

SE-3, 23 JAN 2025 to 20 FEB 2025
SE-3, 23 JAN 2025 to 20 FEB 2025