

VORTAC RSK 115.3 Chan 100	APP CRS 252°	Rwy Idg TDZE 5507 Apt Elev 5507
-----------------------------------------------	------------------------	-----------------------------------------------------

VOR RWY 25


FOUR CORNERS RGNL (FMN)

DME required.


⚠ VDP NA when using Durango-La Plata County altimeter setting. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango-La Plata County altimeter setting and increase all MDAs 260 feet; increase S-25 visibility Cat B/C/D 7/8 SM and Circling visibility Cat A/B/C 1/2 SM.

MISSED APPROACH: Climb to 7100 then climbing left turn to 8400 on heading 060° and on RSK VORTAC R-072 to CROMM/9 DME and hold.

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER★ 118.9 (CTAF) 0 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	---------------------------------------	--------------------------------------------------	-------------------------	-------------------------

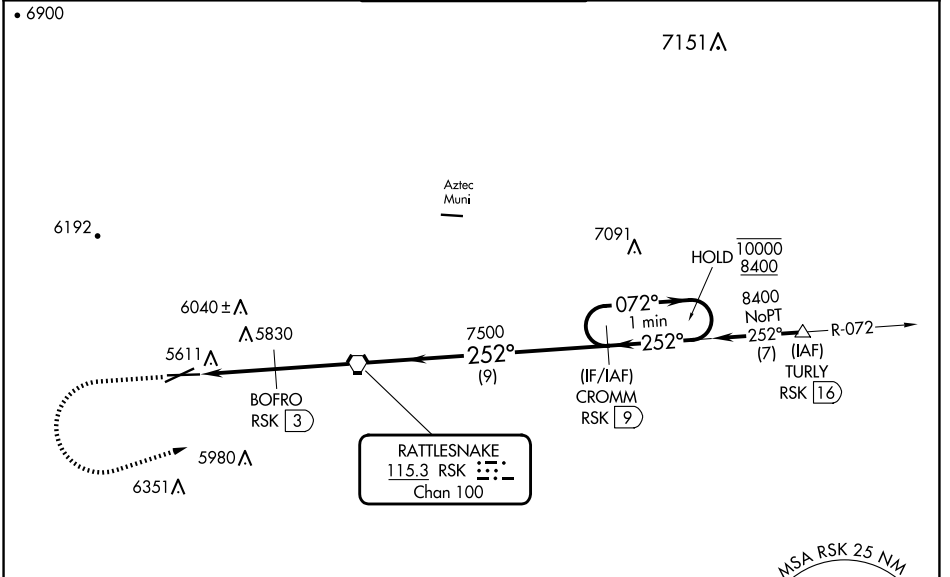

ELEV 5507	D	TDZE 5507
------------------	----------	------------------

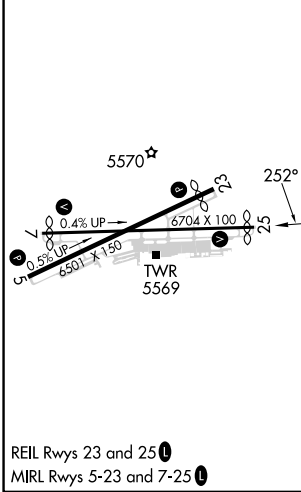

7100	8400	RSK R-072	CROMM RSK 9	CROMM RSK 9	One Minute Holding Pattern
↑	hdg 060°				
		BOFRO RSK 3	RSK VORTAC		072° → 10000 ← 252° 8400
		RSK 5.8	RSK 4.1	3.18°	252°
			TCH 56		7500
					6500
		-1.6 NM	-1.2	3 NM	9 NM
CATEGORY	A	B	C	D	
S-25	6080-1	573 (600-1)	6080-1½	573 (600-1½)	
CIRCLING	6080-1	6140-1	6380-2½	6460-3	
	573 (600-1)	633 (700-1)	873 (900-2½)	953 (1000-3)	

SW-1, 23 JAN 2025 to 20 FEB 2025

SW-1, 23 JAN 2025 to 20 FEB 2025