


|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-SPI<br><b>109.5</b> | APP CRS<br><b>043°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7927</b><br><b>592</b><br><b>598</b> |
|---------------------------|------------------------|-----------------------------|---|


# ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

|   |  |                             |  |  |                               |                          |                         |
|---|--|-----------------------------|--|--|-------------------------------|--------------------------|-------------------------|
| ADF Required.   |  | SPRINGFIELD TOWER ★         |  | GND CON                                      | CLNC DEL                      | UNICOM                   |                         |
| ⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1¾ SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting). |  | ATIS<br><b>127.65 270.1</b> |  | SAINT LOUIS APP CON ★<br><b>126.15 323.0</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>121.7</b> | UNICOM<br><b>122.95</b> |

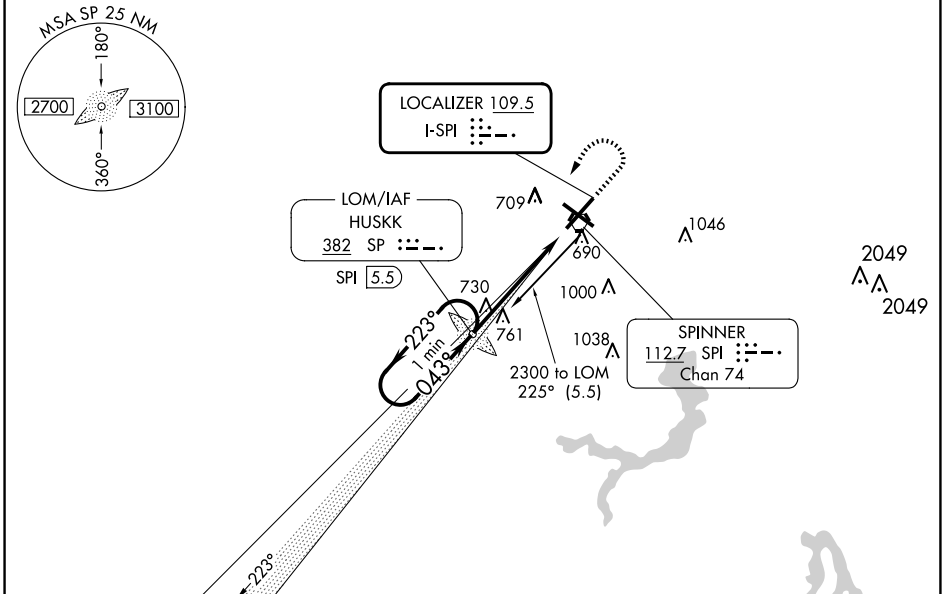

|                            |                       |                       |                         |                         |
|----------------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| One Minute Holding Pattern | SP LOM SPI 5.5        | 1500                  | 2300                    | SP                      |
| 2300 ← 223°<br>043° →      | 2297                  |                       |                         |                         |
| GS 3.00°<br>TCH 56         | 5.1 NM                |                       |                         |                         |
| CATEGORY                   | A                     | B                     | C                       | D                       |
| S-ILS 4                    | * 792/24 200 (200-½)  |                       |                         |                         |
| S-LOC 4                    | 1020/24               | 428 (500-½)           | 1020/40                 | 428 (500-¾)             |
| CIRCLING                   | 1040-1<br>442 (500-1) | 1100-1<br>502 (600-1) | 1360-2¼<br>762 (800-2¼) | 1380-2½<br>782 (800-2½) |

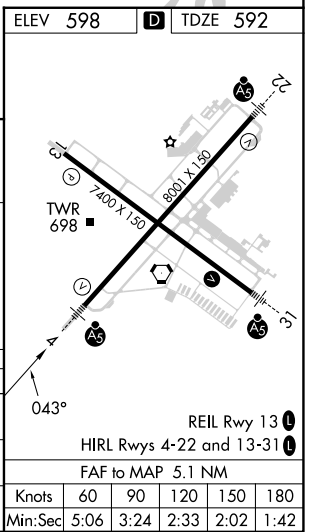

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025