

| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 69216 W30A | APP CRS 300° | Rwy Idg TDZE Apt Elev | 6751 12 15 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 30




JACK BROOKS RGNL (BPT')

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Rwy 30 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Orange County altimeter setting. When local altimeter setting not received, use Orange County altimeter setting: increase LPV DA to 294 feet and all visibilities 1/2 SM. Increase LNAV/VNAV DA to 355 feet and all visibilities 1/2 SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D/E 1/4 SM.

MISSED APPROACH: Climb to 3100 direct GIDDY and hold, continue climb-in-hold to 3100.

| | | | | | |
|----------------------|---------------------------------------|--|--------------------------|--------------------------|-------------------------|
| ATIS 126.3 | HOUSTON APP CON 121.3 377.1 | BEAUMONT TOWER* 119.5 (CTAF) | GND CON 124.85 | CLNC DEL 118.3 | UNICOM 122.95 |
|----------------------|---------------------------------------|--|--------------------------|--------------------------|-------------------------|

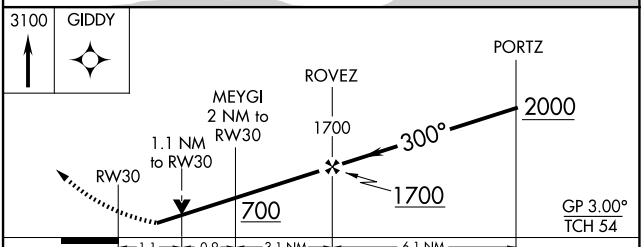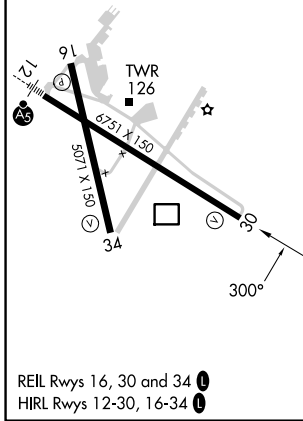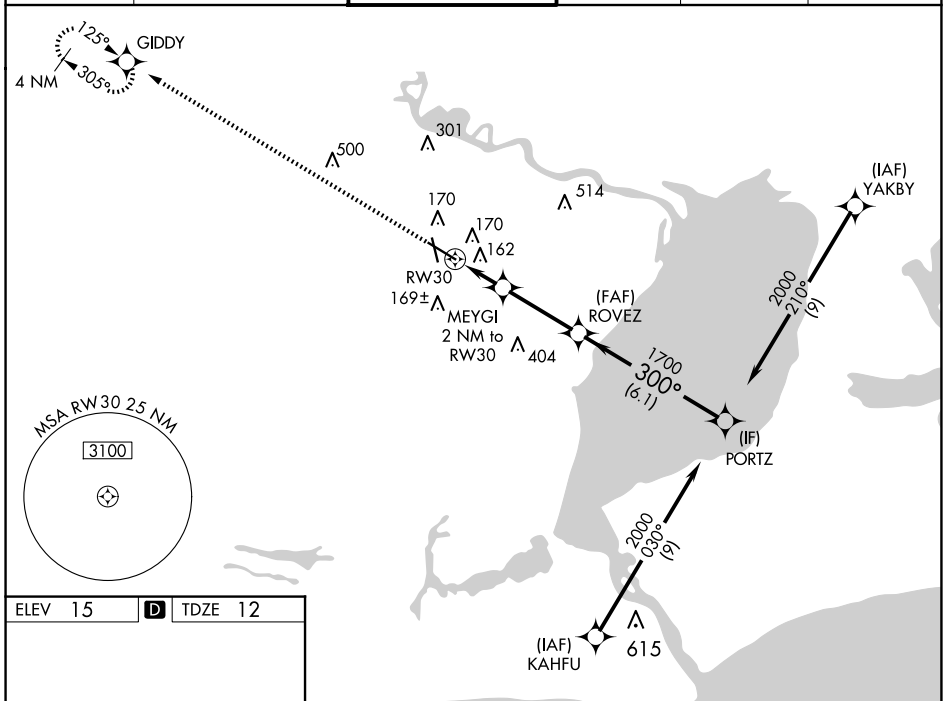

| CATEGORY | A | B | C | D | E |
|--------------|-------|-------------|---------------|-----------------|---|
| LPV DA | | 262-3/4 | 250 (300-3/4) | | |
| LNAV/VNAV DA | | 323-7/8 | 311 (400-7/8) | | |
| LNAV MDA | 420-1 | 408 (500-1) | 420-1 1/8 | 408 (500-1 1/8) | |

SC-5, 23 JAN 2025 to 20 FEB 2025

SC-5, 23 JAN 2025 to 20 FEB 2025