
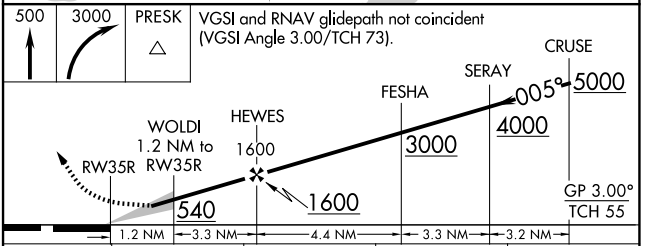
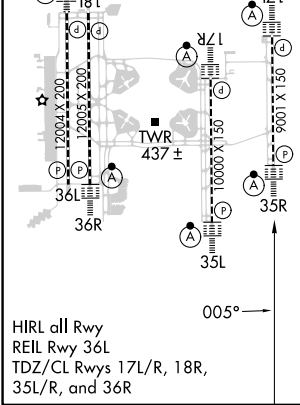


WAAS CH <b>86314</b> <b>W35A</b>	APP CRS <b>005°</b>	Rwy Idg <b>9001</b> TDZE <b>90</b> Apt Elev <b>96</b>
--	------------------------	---

# RNAV (GPS) RWY 35R

ORLANDO INTL (MCO)

RNP APCH. ▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D visibility to RVR 5500. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights.		ALSF-2 A	MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.
D-ATIS ARR <b>121.25</b> DEP <b>120.525</b>	ORLANDO APP CON <b>124.8 307.0</b>	ORLANDO TOWER <b>118.45 253.5</b> (Rwys 17L-35R, 17R-35L) <b>124.3 253.5</b> (Rwys 18L-36R, 18R-36L)	GND CON <b>126.4</b> (East) <b>121.8</b> (West)
		CLNC DEL <b>134.7</b> <b>341.7</b>	CPDLC

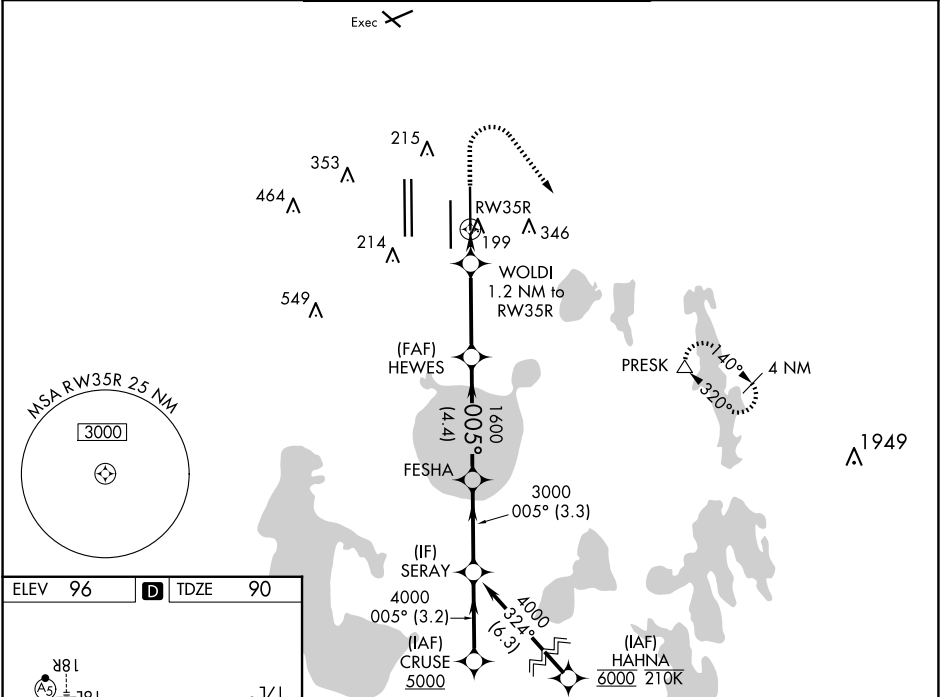

CATEGORY	A	B	C	D
LPV DA		290/18	200 (200-½)	
LNAV/VNAV DA		360/24	270 (300-½)	
LNAV MDA	460/24	370 (400-½)	460/35	370 (400-¾)
CIRCLING	740-1	644 (700-1)	740-1¾ 644 (700-1¾)	740-2 644 (700-2)

SE-3, 23 JAN 2025 to 20 FEB 2025

SE-3, 23 JAN 2025 to 20 FEB 2025