ILS or LOC RWY 4L

JOHN F KENNEDY INTL (JFK)

LOC/DME I-HIQ	APP CRS	Rwy Idg 11010
110.9	044°	TDZE 13
Chan 46		Apt Elev 13

RADAR required for procedure entry. DME or RADAR required for LOC only.

T Simultaneous approach authorized.
A Autopilot coupled approach NA below 200 feet MSL.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 on JFK VOR/DME R-062 to DUFFY INT/JFK 14.8 DME and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125 269.0	Rwys 4R/22L and 13L/31R	119.1 281.55	121.9	135.05	
				Rwys 4L/22R and 13R/31L	123.9 281.55	348.6	348.6	

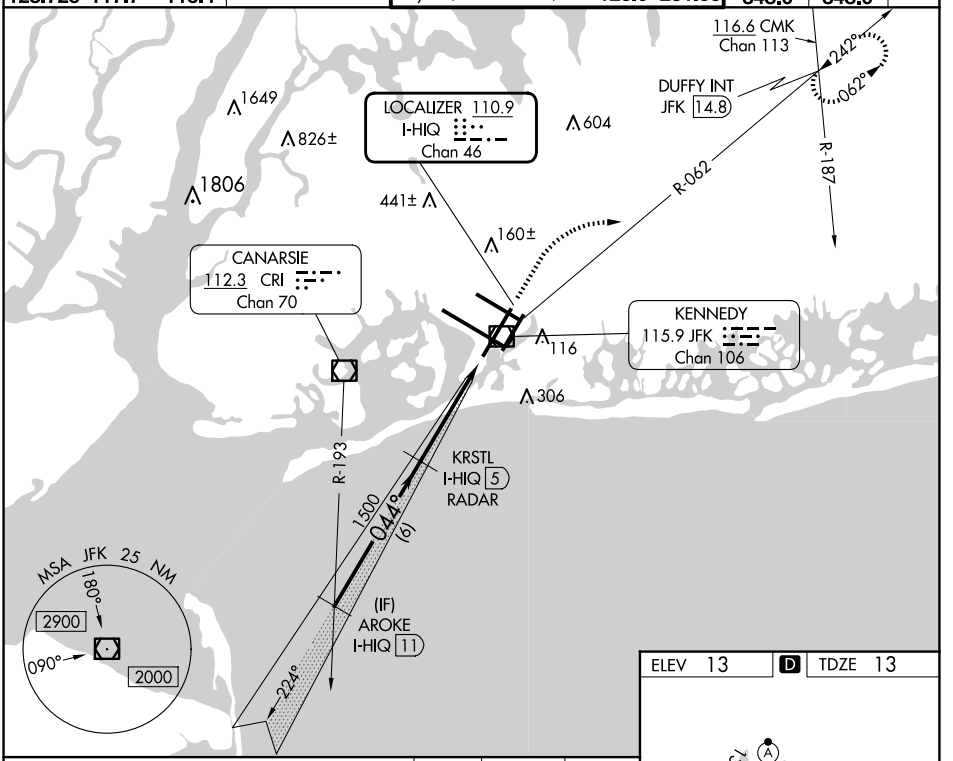

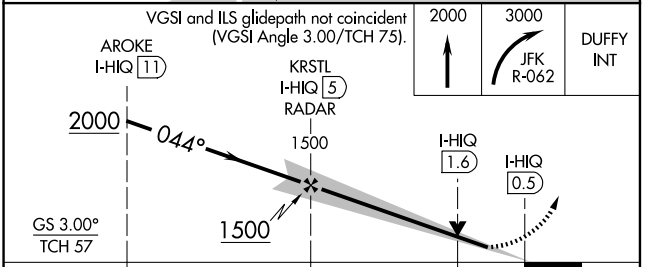

CATEGORY	A	B	C	D
S-ILS 4L	231/40	218 (300-¾)		
S-LOC 4L	460/55	447 (500-1)	460-1⅜	447 (500-1⅜)
C CIRCLING	640-1	627 (700-1)	700-2 687 (700-2)	700-2¼ 687 (700-2¼)

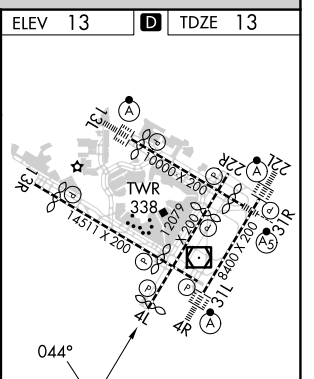

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-2, 23 JAN 2025 to 20 FEB 2025
NE-2, 23 JAN 2025 to 20 FEB 2025