| WAAS | APP CRS | Rwy Idg | 7701 |
|---|---|---|---|
| CH 69217 | 044° | TDZE | 889 |
| W04A | | Apt Elev | 913 |

# RNAV (GPS) RWY 4

CHIPPEWA VALLEY RGNL (EAU)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ⅞ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH: Climb to 3000 direct IROKE and hold.

| ATIS | MINNEAPOLIS CENTER | EAU CLAIRE TOWER* | GND CON | UNICOM |
|---|---|---|---|---|
| 126.025 | 125.3 335.6 | 118.575 (CTAF) L | 120.925 | 122.95 |

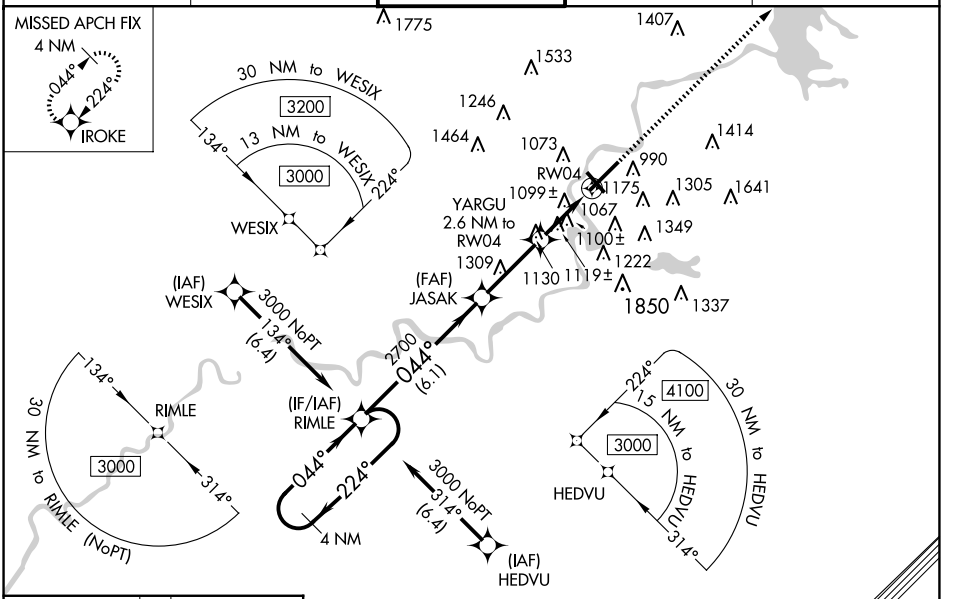


EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025

ELEV 913 D TDZE 889

FALLS 1 MOA

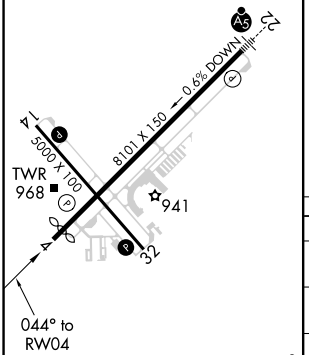


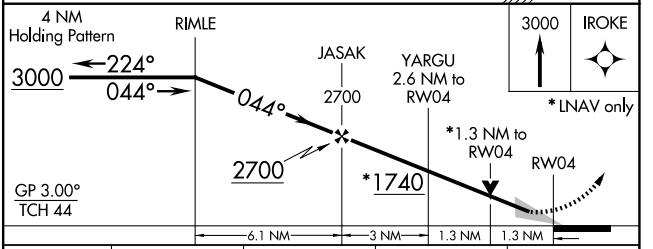


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1089-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 1379-1⅝ 490 (500-1⅝) | | | |
| LNAV MDA | 1360-1 471 (500-1) | | 1360-1⅜ 471 (500-1⅜) | |
| C CIRCLING | 1480-1 567 (600-1) | 1540-1 627 (700-1) | 1660-2¼ 747 (800-2¼) | 2200-3 1287 (1300-3) |

HIRL Rwy 4-22 L
MIRL Rwy 14-32 L
REIL Rwys 4 and 14 L