
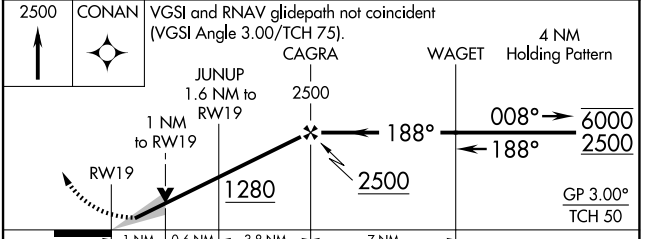
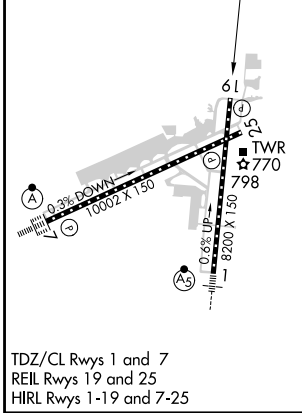


WAAS CH <b>40435</b> W19A	APP CRS <b>188°</b>	Rwy Idg TDZE Apt Elev	<b>8099</b> <b>736</b> <b>742</b>
---------------------------------	------------------------	-----------------------------	---

# RNAV (GPS) RWY 19

CHICAGO/ROCKFORD INTL (R.F.D)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2500 direct CONAN and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.					
ATIS <b>127.6</b>	ROCKFORD APP CON <b>121.0 327.0</b>	ROCKFORD TOWER <b>118.1 290.375</b>	GND CON <b>121.9 290.375</b>	CLNC DEL <b>119.25</b>	

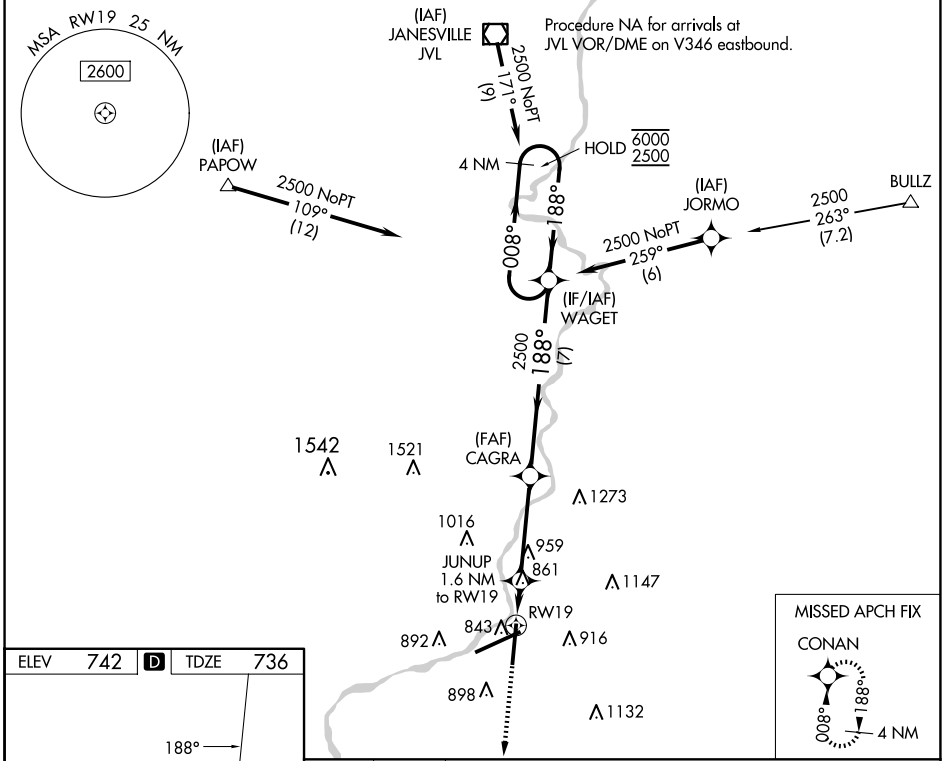

CATEGORY	A	B	C	D
LPV DA	936-3/4 200 (200-3/4)			
LNAV/VNAV DA	1039-7/8 303 (300-7/8)			
LNAV MDA	1120-1	384 (400-1)	1120-1 1/2	384 (400-1 1/2)
CIRCLING	1220-1	1280-1	1320-1 1/2	1460-2 1/4
	478 (500-1)	538 (600-1)	578 (600-1 1/2)	718 (800-2 1/4)

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025