RNAV (GPS) RWY 29

GAINESVILLE RGNL (GNV)

WAAS CH 60916 W29A	APP CRS 286°	Rwy Idg 7504 / TDZE 122 / Apt Elev 151

DME/DME RNP-0.3 NA. For inoperative MALSR, increase LPV all Cats visibility to RVR 5000 and increase LNAV Cat D visibility to RVR 6000. For inoperative MALSR using Ocala Intl-Jim Taylor Fld altimeter setting, increase LPV all Cats visibility to 1½ mile. When local altimeter setting not received, use Ocala Intl-Jim Taylor Fld altimeter setting and increase LPV DA to 501 feet and all Cats visibility to RVR 5000; increase LNAV/VNAV DA to 561 feet and all Cats visibility to RVR 5000; increase all MDAs 100 feet and increase LNAV Cat C visibility to RVR 4000; increase Circling Cat C visibility ¼ SM and Circling Cat D ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Baro-VNAV and VDP NA when using Ocala Intl-Jim Taylor Fld altimeter setting. When VGSI inoperative, Circling Rwy 25 NA at night.

MALSR

MISSED APPROACH: Climb to 2100 direct LOLRY and hold.

ATIS	JACKSONVILLE APP CON	GAINESVILLE TOWER ★	GND CON	UNICOM
127.15	118.175 338.25	119.55 (CTAF) L 353.7	121.7	122.95

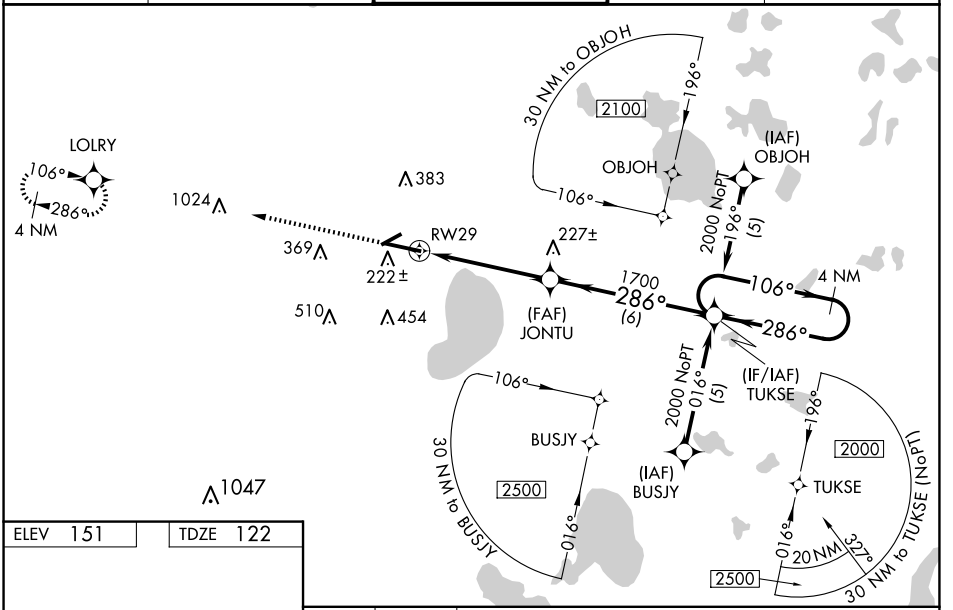

ELEV 151 | TDZE 122



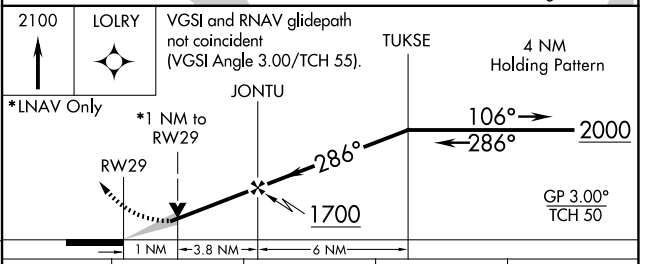

CATEGORY	A	B	C	D
LPV DA	420/24 298 (300-½)			
LNAV/VNAV DA	480/40 358 (400-¾)			
LNAV MDA	500/24 378 (400-½)			500/50 378 (400-1)
CIRCLING	620-1 469 (500-1)	700-1 549 (600-1)	760-1¾ 609 (700-1¾)	820-2 669 (700-2)

REIL Rwy 11
MIRL Rwy 7-25 L
HIRL Rwy 11-29 L

SE-3, 23 JAN 2025 to 20 FEB 2025
SE-3, 23 JAN 2025 to 20 FEB 2025