WAAS	APP CRS		
CH **86938**	**176°**	Rwy Idg	**5513**
W18A		TDZE	**1298**
		Apt Elev	**1304**

RNAV (GPS) RWY 18

MITCHELL MUNI (MHE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Huron Rgnl altimeter setting and increase LPV DA to 1637, LNAV/VNAV DA to 1685 and increase all MDA 100 feet. Increase LPV visibility all Cats to 1⅛ mile, LNAV/VNAV visibility all Cats to 1⅜ mile and LNAV Cats C/D to 1⅜ mile. Increase Circling Cat C visibility to 1¾ mile. Baro VNAV and VDP NA when using Huron Rgnl altimeter setting.

MISSED APPROACH: Climb to 3500 direct AVAME and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
124.175	**126.25 339.8**	**122.8** (CTAF) L



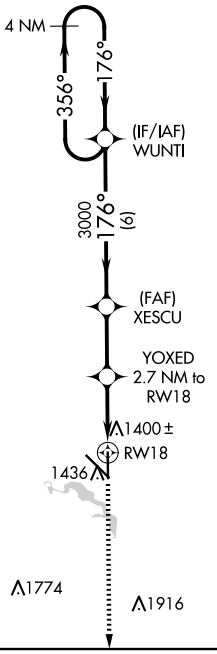



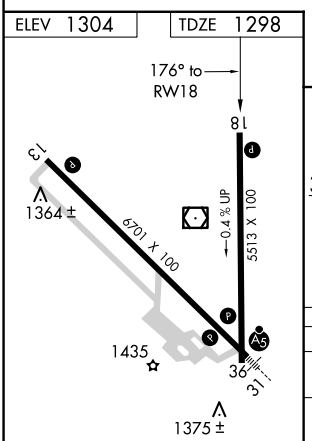

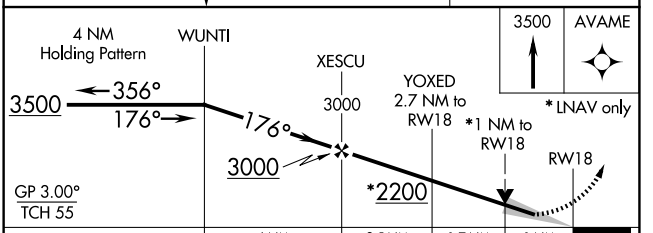

CATEGORY	A	B	C	D
LPV DA	1548-1 250 (300-1)			
LNAV/VNAV DA	1596-1 298 (300-1)			
LNAV MDA	1660-1 362 (400-1)			
C CIRCLING	1740-1 436 (500-1)	1760-1 456 (500-1)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)

HIRL Rwy 13-31 L
MIRL Rwy 18-36 L
REIL Rwys 13 and 18 L

NC-1, 23 JAN 2025 to 20 FEB 2025
NC-1, 23 JAN 2025 to 20 FEB 2025