ILS or LOC RWY 27

ELKHART MUNI (EKM)

LOC I-OUP	APP CRS	Rwy Idg	6500
111.5	274°	TDZE	778
		Apt Elev	778

When local altimeter setting not received, use South Bend altimeter setting and increase all DA/MDA 40 feet, and increase S-LOC 27 Cat C/D visibility to RVR 5000. Circling Rwy 36 NA at night. Circling NA to Rwys 8 and 26. Rwy 27 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-ILS 27 all Cats visibility to RVR 4500 and S-LOC 27 Cat A/B visibility to RVR 5500. For inop ALS when using South Bend altimeter setting, increase S-LOC 27 Cat A/B visibility to RVR 5500 and Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 direct GSH VORTAC and hold.

AWOS-3	SOUTH BEND APP CON ★		ELKHART TOWER ★	GND CON	CLNC DEL	CLNC DEL (When twr closed)	UNICOM
124.475	118.55	257.8	119.5 (CTAF) L	121.8	121.8	119.7	122.95

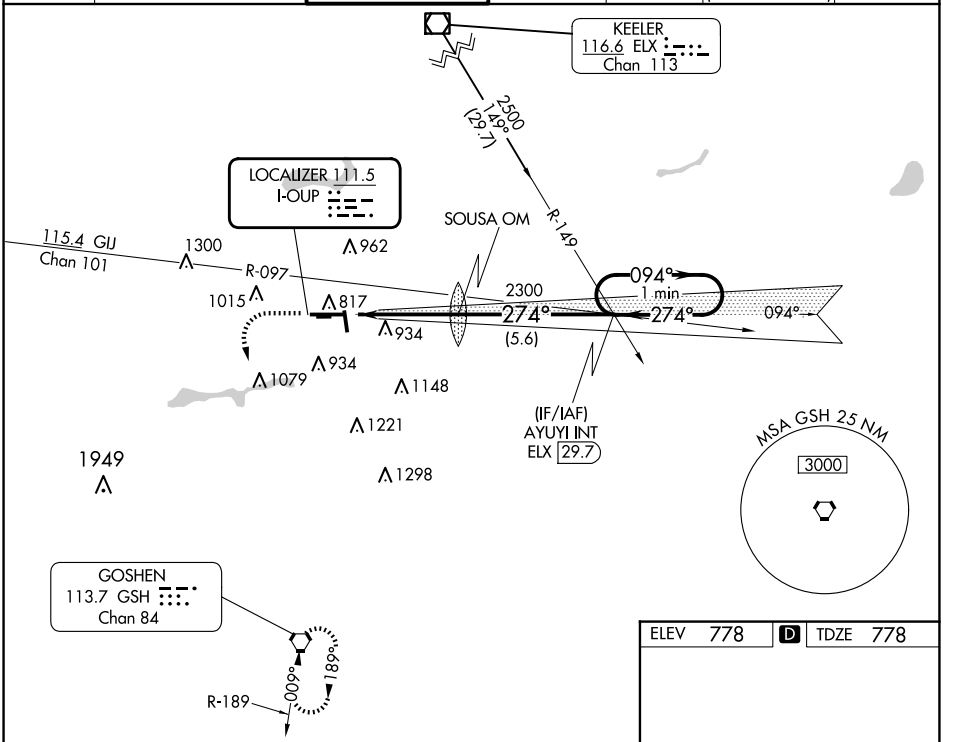

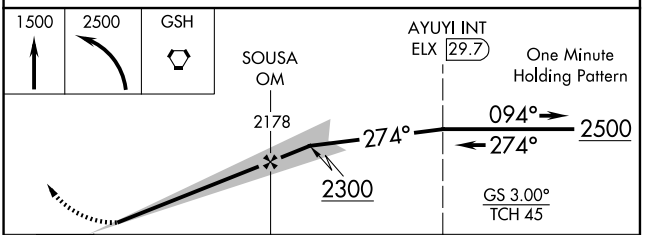

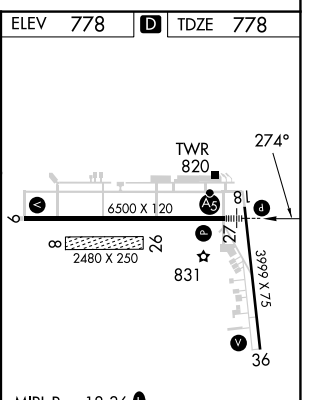

CATEGORY	A	B	C	D
S-ILS 27		1066/40	288 (300-¾)	
S-LOC 27	1220/40	442 (500-¾)	1220/45	442 (500-⅞)
C CIRCLING	1240-1 462 (500-1)	1300-1 522 (600-1)	1380-1¾ 602 (700-1¾)	1580-2½ 802 (900-2½)

MIRL Rwy 18-36 L
HIRL Rwy 9-27 L
REIL Rwys 9, 18 and 36 L

FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

EC-2, 23 JAN 2025 to 20 FEB 2025
EC-2, 23 JAN 2025 to 20 FEB 2025