
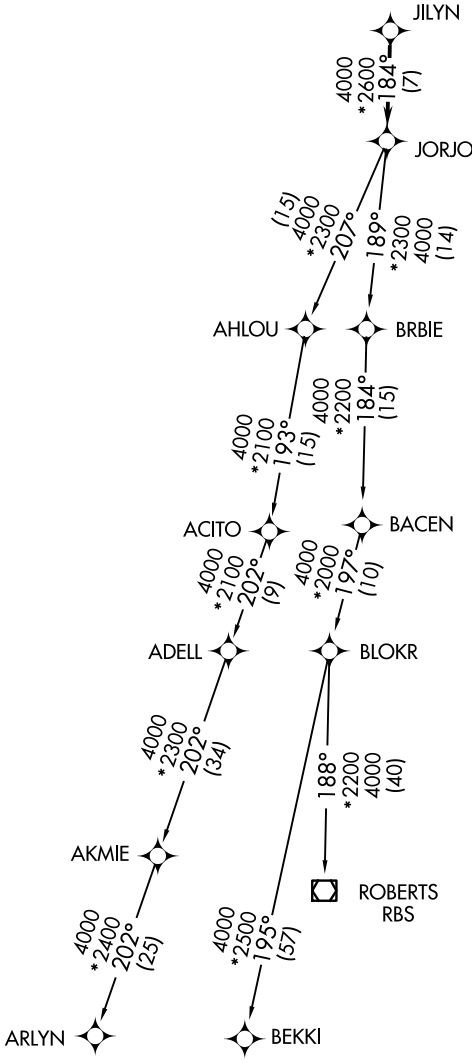


JORJO FIVE DEPARTURE (RNAV)

ATIS
132.4
GND CON
121.65
WAUKEGAN TOWER*
120.05 273.55
DEP CON
120.55

**TOP ALTITUDE:
3000**



TAKEOFF MINIMUMS

Rwys 5, 32: Standard with minimum climb of 500' per NM to 1240.
Rwys 14, 23: Standard with minimum climb of 500' per NM to 1230.

- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: TURBOJET departures maintain 250K until advised by ATC.
- NOTE: AKMIE transition: for aircraft inbound to BMI, SPI, or PIA, or as assigned by ATC.
- NOTE: ROBERTS transition: for aircraft inbound to CMI or STL, or as assigned by ATC.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

JORJO FIVE DEPARTURE (RNAV)

JORJO FIVE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWY 5: Climb heading 051° or as assigned by ATC to at or above 1240, expect vectors to JILYN, thence
- TAKEOFF RWY 14: Climb heading 147° or as assigned by ATC to at or above 1230, expect vectors to JILYN, thence
- TAKEOFF RWY 23: Climb heading 231° or as assigned by ATC to at or above 1230, expect vectors to JILYN, thence
- TAKEOFF RWY 32: Climb heading 327° or as assigned by ATC to at or above 1240, expect vectors to JILYN, thence

. . . . on track 184° to JORJO, then on (transition), maintain 3000, expect filed altitude ten minutes after departure.

- AKMIE TRANSITION (JORJO5.AKMIE)
- ARLYN TRANSITION (JORJO5.ARLYN)
- BEKKI TRANSITION (JORJO5.BEKKI)
- ROBERTS TRANSITION (JORJO5.RBS)

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025