


LOC I-PEK <b>110.3</b>	APP CRS <b>257°</b>	Rwy ldg <b>10000</b> TDZE <b>27</b> Apt Elev <b>30</b>
---------------------------	------------------------	--

# ILS Y or LOC Y RWY 26


JACKSONVILLE INTL (JAX)

ADF required. RADAR required for procedure entry.


▼ For inop ALS, ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.

MALSR  MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.

D-ATIS <b>125.85</b>	JACKSONVILLE APP CON <b>119.0 269.9</b>	JACKSONVILLE TOWER <b>118.3 317.7</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>119.5 290.275</b>	CPDLC
-------------------------	--	--	-------------------------------	----------------------------------	-------

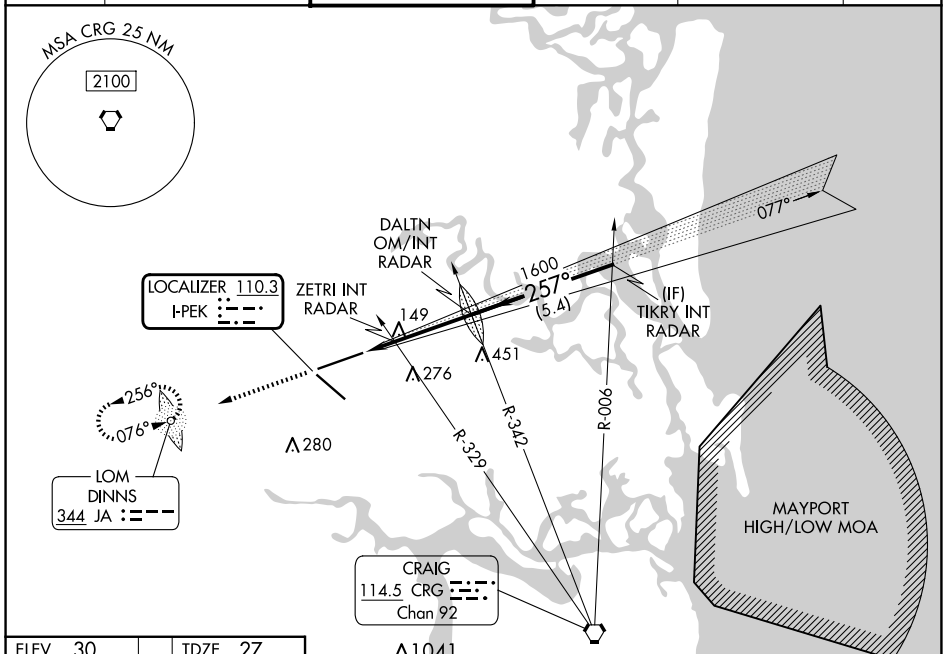

ELEV 30	TDZE 27
---------	---------

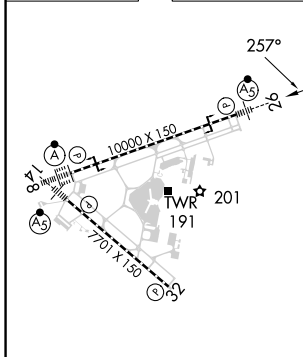

CATEGORY	A	B	C	D
S-ILS 26	227/18 200 (200-½)			
S-LOC 26	480/24	453 (500-½)	480/45	453 (500-¾)
<b>C</b> CIRCLING	520-1	490 (500-1)	580-1½	580-2
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 26	400/24	373 (400-½)	400/35	373 (400-¾)
<b>C</b> CIRCLING	520-1	490 (500-1)	580-1½	580-2
			550 (600-1½)	550 (600-2)

REIL Rwy 32  
TDZ/CL Rwys 8, 14, and 26  
HIRL Rws 8-26 and 14-32

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

SE-3, 23 JAN 2025 to 20 FEB 2025

SE-3, 23 JAN 2025 to 20 FEB 2025